

Structural bearings —

Part 7: Spherical and cylindrical PTFE bearings

The European Standard EN 1337-7:2000 has the status of a British Standard

ICS 91.010.30; 93.040

National foreword

This British Standard is the official English language version of EN 1337-7:2000.

The UK participation in its preparation was entrusted to Technical Committee B/522, Structural bearings, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 26, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard, having been prepared under the direction of the Sector Committee for Building and Civil Engineering, was published under the authority of the Standards Committee and comes into effect on 15 February 2001

© BSI 02-2001

ISBN 0 580 36965 X

Amendments issued since publication

Amd. No.	Date	Comments

ICS 91.010.30

English version

Structural bearings - Part 7: Spherical and cylindrical PTFE bearings

Appareils d'appui structuraux - Partie 7: Appareils d'appui
cylindriques et sphériques comportant du PTFE

Lager im Bauwesen - Teil 7: Kalotten- und Zylinderlager mit
PTFE

This European Standard was approved by CEN on 18 November 2000.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Foreword	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Terms and definitions, symbols and abbreviations	5
4 Functional requirements	10
5 Material properties	10
6 Design requirements	10
7 Manufacturing, assembly and tolerances	13
8 Conformity evaluation	13
Annex A (informative) Method for calculating the eccentricities in spherical and cylindrical PTFE bearings	14
Annex B (informative) Reduced area for curved sliding surfaces	16
Annex ZA (informative) Provisions for the CE marking of cylindrical and spherical PTFE bearings (with or without flat sliding elements) under the EU Construction Products Directive	19

Foreword

This European Standard has been prepared by Technical Committee CEN/TC 167 "Structural bearings", the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2001, and conflicting national standards shall be withdrawn at the latest by June 2001.

This European Standard EN 1337 "Structural bearings", consists of the following 11 Parts:

Part 1: General design rules

Part 2: Sliding elements

Part 3: Elastomeric bearings

Part 4: Roller bearings

Part 5: Pot bearings

Part 6: Rocker bearings

Part 7: Spherical and cylindrical PTFE bearings

Part 8: Guide bearings and restrain bearings

Part 9: Protection

Part 10: Inspection and maintenance

Part 11: Transport, storage and installation

Further to CEN/TC 167's decision Part 1 and 2 form a package of standards and they come into force together, while the other parts come into force separately after the publication of Parts 1 and 2.

Annexes A, B and ZA are informative.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Introduction

This standard considers a minimum operating temperature of -35°C .

An extension down to -40°C will be considered in a future amendment.

Applications beyond the range of temperature given in clause 1 need special consideration not covered by this standard. Characteristics, requirements and test procedures given in this standard do not apply in such cases.

1 Scope

This European Standard deals with the requirements for the design and manufacture of spherical and cylindrical PTFE bearings. The requirements and properties of the curved sliding surfaces are included in EN 1337-2:2000. Spherical and cylindrical bearings with an included angle $2\theta > 60^\circ$ and $2\theta > 75^\circ$ respectively are beyond the scope of this European Standard. (see Figure 6).

For the purpose of controlling the degree of freedom the bearings may be combined with flat sliding elements and guides according to EN 1337-2:2000 and restraining rings as per 6.3.4.

Cylindrical bearings are susceptible to unexpected moments about the transverse axis of the cylindrical surface. Additional limitation of application to be taken into consideration is given in clause 1 of EN 1337-2:2000.

2 Normative references

This European Standard incorporates, by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter.

For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies (including amendments).

EN 1337-1:2000	Structural bearings - Part 1: General design rules
EN 1337-2:2000	Structural bearings - Part 2: Sliding elements
prEN 1337-5:1996	Structural bearings - Part 5: Pot bearings

3 Terms and definitions, symbols and abbreviations

3.1 Terms and definitions

For the purposes of this European Standard, the following terms and definitions apply.

3.1.1

backing plate


metallic component which supports sliding materials.

3.1.2


cylindrical PTFE bearing

bearing consisting of a backing plate with a convex cylindrical surface (rotational element) and a backing plate with a concave cylindrical surface between which a PTFE sheet and the mating material form a curved sliding surface (see Figure 1). Cylindrical PTFE bearings are also used in combination with flat sliding elements and guides to form free or guided bearings (see Figure 2).

NOTE Numbers in brackets in Figures 1 and 2 refer to the examples shown in Figure 1 of EN 1337-1:2000.

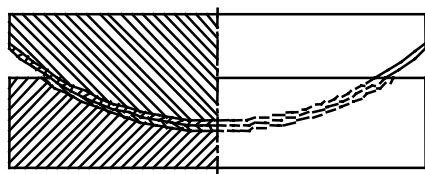


a) fixed by end stops and sliding surface (7.1)




b) without end stops for displacements in y direction (7.2)


Figure 1 - Cylindrical PTFE bearings

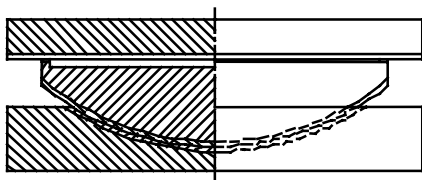

a) free for displacements in any direction (7.4)

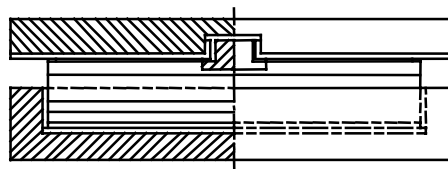

b) guided by an internal guide for displacements in x direction (7.3)

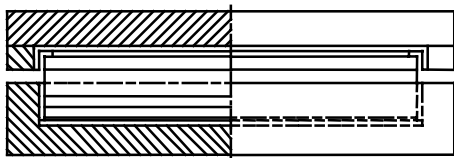

c) guided by external guides for displacements in x direction

Figure 2 - Cylindrical PTFE bearings combined with flat sliding elements

3.1.3

guide

sliding element which restrains a sliding bearing from moving in one axis.

3.1.4

lubricant

special grease used to reduce the friction and wear in the sliding surfaces.

3.1.5

mating surface

hard smooth metallic surface against which the PTFE slides.

3.1.6

polytetrafluoroethylene (PTFE)

a thermoplastic material used for its low coefficient of friction.

3.1.7

sliding materials

materials which form sliding surfaces.

3.1.8

sliding surface

combination of a pair of flat or curved surfaces of different materials which allow relative displacements.


3.1.9

spherical PTFE bearing

bearing consisting of a backing plate with a convex spherical surface (rotational element) and a backing plate with a concave spherical surface between which a PTFE sheet and the mating material form a curved sliding surface (see Figure 3).

Spherical PTFE bearings are also used in combination with flat sliding elements and guides to form free and guided bearings (see Figures 4 a) to 4 c)). Spherical PTFE bearings combined with a flat sliding element can be used together with a restraining ring to form fixed bearings (see Figure 4 d)).

NOTE Numbers in brackets in Figures 3 and 4 refer to the examples shown in Figure 1 of EN 1337-1:2000.

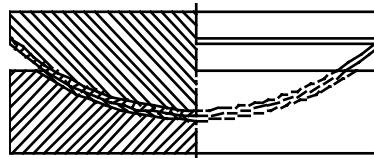

NOTE Fixed by sliding surface (3.2).

Figure 3 - Spherical PTFE bearing

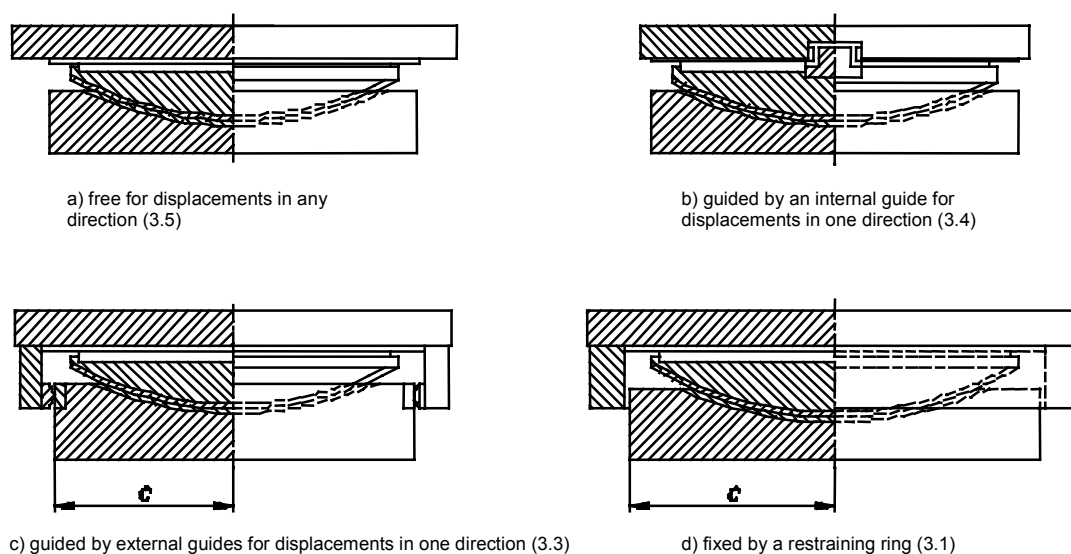


Figure 4 - Spherical PTFE bearings combined with flat sliding elements

3.2 Symbols

The most frequently occurring symbols are defined below. Those that are local, and unique to a particular clause, are defined at their first appearance.

3.2.1 Latin upper case letters

A	contact area of sliding surface; projected area of the curved sliding surface	mm ²
L	diameter or diagonal of the projected area of the PTFE sheet mm

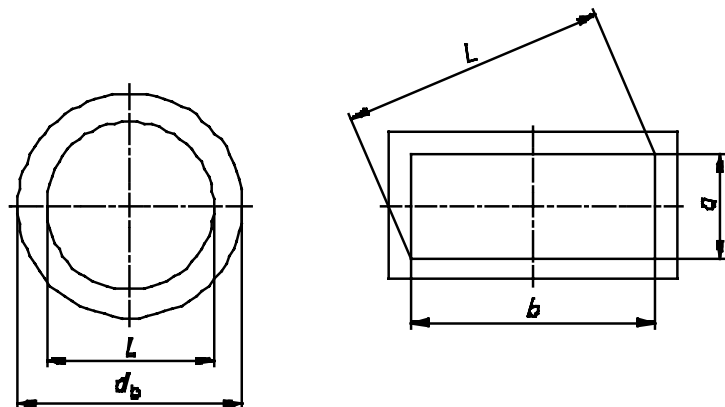


Figure 5 - Plan dimensions of spherical and cylindrical bearings

N	axial or normal force.....	N; kN
V	lateral or shear force	N; kN

3.2.2 Latin lower case letters

a	side of the projection in plan of rectangular PTFE surfaces	mm
b	as before; distance from the projected area of the curved sliding surface	mm
c	dimension	mm
d	diameter	mm
e	eccentricity	mm
f	nominal compressive strength	N/mm ²
h	protrusion of PTFE sheet from its recess	mm
r	radius of curvature	mm
t	thickness	mm
x	longitudinal axis	
y	transverse axis	
z	axis normal to the principal bearing surface	

3.2.3 Greek letters

α	rotation angle.....	radians
β	deviation angle from vertical axis of the line of action of the applied load	degrees, radians
Δz	maximum deviation of plane or curved sliding surfaces from theoretical surface	mm
θ	half included angle of PTFE curved surfaces	degrees, radians
λ	ratio, coefficient	
μ	coefficient of friction	
σ	normal pressure	N/mm ²

3.2.4 Subscripts

b	backing plate
d	design value
min	minimum
p	PTFE
S	internal forces and moments from actions
t	total

3.3 Abbreviations

PTFE Polytetrafluoroethylene

4 Functional requirements

4.1 General

Cylindrical PTFE bearings shall permit rotational movements about one axis, spherical PTFE bearings about any axis. They shall be capable of transferring specified forces between superstructure and substructure.

4.2 Functional requirements for coefficient of friction

The sliding surfaces shall meet the functional requirements given in 4.1 of EN 1337-2:2000.

4.3 Functional requirements for load bearing capacity

The sliding surfaces shall meet the functional requirements given in 6.8.3 and 6.9 of EN 1337-2:2000.

4.4 Functional requirements for rotation capability

The sliding surfaces shall meet the functional requirements given in clause 4 of EN 1337-2:2000.

5 Material properties

The materials to be used and the properties to be verified shall be in accordance with clause 5 of EN 1337-2:2000.

6 Design requirements

NOTE This clause gives requirements for the design of components which are specific to spherical and cylindrical bearings and which are in addition to those given in clause 6 of EN 1337-2:2000.

6.1 Design principles


For design calculations the principles given in clause 5 of EN 1337-1:2000 shall be taken into account.

NOTE The design values of internal forces and moments as well as of movements should be available from a bearing schedule as shown in annex B of EN 1337-1:2000.

6.2 Design verification for curved sliding surfaces

6.2.1 General

For the purpose of verifications as per 6.2.2 and 6.2.3 the curved sliding surface shall be replaced by its projection on a plane surface as shown in Figure 6.

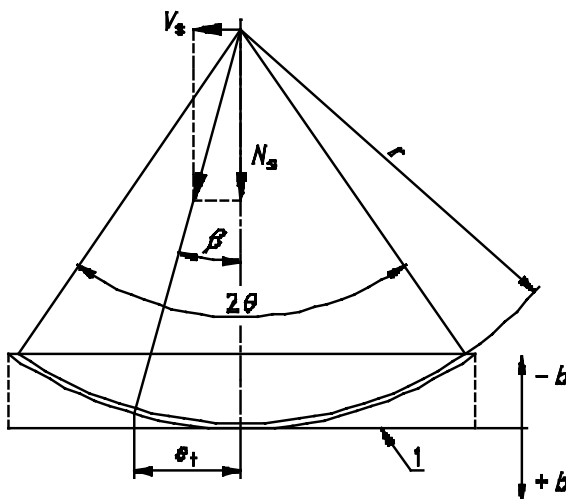

Key

1 Projected area

Figure 6 - Verification scheme for the curved sliding surface (example)

Internal forces and moments acting on the curved sliding surface due to frictional resistance, externally applied horizontal loads and the rotated condition of the bearing shall be taken into account when determining the resulting total eccentricity e_t of the axial force N_s .

Secondary effects due to the action of the restraints shall also be considered.

NOTE In annex A of this standard, formulae are given for the evaluation of the eccentricities in the most common cases.

The frictional resistance shall be determined using the design coefficients of friction given in Table 11 of EN 1337-2:2000.

6.2.2 Separation of sliding surfaces

NOTE Separation of the sliding surfaces may lead to wear due to contamination and increased deformation due to lack of confinement. As this could endanger long term fitness for use, the condition $\sigma_p = 0$ is considered as serviceability limit state.

It shall be verified that $\sigma_p \geq 0$ in all load combinations at serviceability limit state. In doing so the sliding material shall be assumed to be linear elastic and the backing plates shall be deemed to be rigid.

The condition $\sigma_p \geq 0$ is satisfied at serviceability limit state when the total eccentricity e_t falls within the kernel of the project area.

For spherical bearings this condition is satisfied when:

$$\mathbf{e}_t \geq \frac{L}{8} \quad (1)$$

Dimension L is shown in Figure 5.

6.2.3 Compressive stress verification

NOTE Excessive pressure may cause loss of the sliding function and this may lead to structural failure or states close to structural failure. Therefore this condition is considered ultimate limit state.

The following conditions shall be verified at ultimate limit state:

$$N_{Sd} \leq f_d \times A_r \quad (2)$$

where:

N_{Sd} is the design axial force at ultimate limit state
 f_d design compressive strength for PTFE sheets
(see Table 10 of EN 1337-2:2000)
 A_r is the reduced contact area of the curved sliding surface

The reduced area A_r is given by the formula:

$$A_r = \lambda \times A$$

where:

A is the area of the projected curved sliding surface (see Figure 6)
 λ is a coefficient given in annex B

6.2.4 Rotation capability

For the purpose of ultimate limit state verification having taken into account the increased movement requirements specified in EN 1337-1:2000, 5.4, it shall be shown that the metallic surfacing mating with the PTFE material is so proportioned that it completely covers the PTFE sheet at the maximum rotation condition. Moreover, there shall be no contact between the upper and the lower part of the bearing or any other metallic component at this condition. See EN 1337-1:2000, annex A.

6.3 Design details

6.3.1 General

For basic design features clause 7 of EN 1337-1:2000 applies.

The permissible material combinations of curved sliding surfaces are given in Table 9 of EN 1337-2:2000.

6.3.2 Curved PTFE sheet

The curved PTFE sheet may be attached to either the convex or the concave backing plate.

The design details of curved PTFE sheet shall be in accordance with 6.2.1 and 6.2.2 of EN 1337-2:2000

6.3.3 Backing plates with concave surfaces

For cylindrical and spherical bearings, backing plates with concave surface shall be verified in accordance with 6.9 of EN 1337-2:2000.

Dimensional limitations of backing plates with concave surfaces are shown in Figure 7.

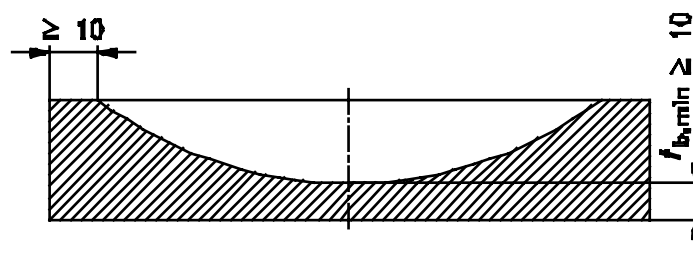


Figure 7 - Dimensional limitations of a backing plate with a concave surface.

6.3.4 Restraining ring

Free spherical bearings (see Figure 4 a)) may be fixed by a steel restraining ring as shown in Figure 4 d).

For design and verification, the design rules for pot and piston of pot bearings given in clause 6 of prEN 1337-5:1996 shall be followed.

7 Manufacturing, assembly and tolerances

Requirements for flat and curved sliding surfaces are given in clause 7 of EN 1337-2:2000.

Protrusion "h" of curved PTFE sheets shall be measured as shown in Figure 2 of EN 1337-2:2000.

8 Conformity evaluation

Conformity to this Part shall be demonstrated in accordance with relevant subclauses of clause 8 of EN 1337-2:2000. The given systems of attestation of conformity (see ZA.2.1) are also valid for non-serial productions.

Annex A (informative)

Method for calculating the eccentricities in spherical and cylindrical PTFE bearings

A.1 General

Frictional forces, forces from applied horizontal loads and the rotated condition of the bearing produce eccentricity of the axial force N_s , which is used in the verification of PTFE sheets, the adjacent structural members and the anchoring devices.

This annex gives methods for calculating the significant eccentricities.

Depending on the design features of a particular bearing, additional eccentricities may exist.

When several eccentricities occur in a cross-section under consideration, they need to be added.

A.2 Friction resistance

A.2.1 Curved sliding surfaces

In the presence of rotational movements, in both cylindrical and spherical bearings, an internal moment occurs due to the frictional resistance.

Regardless of whether the bearing has one or two surfaces, the associated eccentricity e_1 is:

$$e_1 = \mu_{\max} \times r \quad (\text{A.1})$$

The coefficient of friction μ_{\max} is given in Table 11 of EN 1337-2:2000.

A.2.2 Sliding surfaces with external guides and restraining rings

For the spherical bearings of the type shown in Figures 4 c) and 4 d), rotational movements produce an eccentricity which affects only the adjacent structural members (i.e. plinth, beam etc) and the anchoring devices, where:

$$e_2 = \frac{V_s}{N_s} \times \mu_{\max} \times c \quad (\text{A.2})$$

For the bearing of the type shown in Figure 4 c), the coefficient of friction μ_{\max} is given in 6.7 of EN 1337-2:2000.

For the bearing of type shown in Figure 4 d), μ_{\max} should be assumed to be 1,0.

A.3 Rotation

In all the types of bearings with two sliding surfaces as in Figures 2 a), b), c) and 4 a) b), c), d), a rotation angle α produces an eccentricity e_3 of the vertical load on the curved surface equal to:

$$e_3 = \alpha \times (r + b) \quad (\text{A.3})$$

where b represents the distance between the cross-section under consideration and the sliding surface (see Figure 6). At any rate, this eccentricity acts nonetheless in the opposite direction to that given under A.2.

The occurrence of e_3 depends on whether the curved PTFE sheet is either attached to the convex or concave backing plate and whether the value α is greater or lesser than μ as well as on whether the bearing clearance is performing its function effectively in the case of guided bearings.

Because of the uncertainty concerning the actual values of α and μ as well as the effect bearing clearance can entail, it is suggested that e_3 should in any case be taken into account since a precise analysis cannot be carried out.

In the type of bearings equipped with only one sliding surface as the ones shown in Figures 1 and 3, e_3 occurs only in the curved PTFE sheet and, furthermore, only when said sheet is attached to the convex backing plate.

A.4 Lateral forces

Lateral forces result from horizontal actions and the friction resistance of the other bearings in the structure.

In bearings where lateral forces are transmitted by guides or restraining rings, the eccentricity in the curved sliding surface is equal to zero.

In bearings of the fixed type with only one sliding surface as in Figures 1 and 3 and in the guided spherical bearing as in Figure 4 b), the horizontal load V_s produces an eccentricity given by (see Figure 6):

$$e_4 = \frac{V_s}{N_s} \times (r + b) \quad (A.4)$$

In all cases where the lines of application of lateral action and reaction are not coincident (see e.g. Figure 2 b)) the resulting couple causes an eccentricity that shall be additionally taken into account.

Annex B (informative)

Reduced area for curved sliding surfaces

B.1 General

This annex gives the values of the coefficient λ used in 6.2.3 for the calculation of the reduced area A_r of curved sliding surfaces.

B.2 Modelling assumptions

The values of the coefficient λ have been calculated by means of a mathematical model made with the following assumptions:

- 1) only compressive stresses are transmitted
- 2) the stresses in the compressed area are constant and equal to the design value f_d of compressive resistance of PTFE sheets (i.e. the stress block theory is adopted)
- 3) stresses are always normal to the contact surface: a conservative hypothesis justified by the low coefficient of friction of PTFE in contact with polished metal surfaces
- 4) both concave and convex backing plates are perfectly rigid; a conservative hypothesis justified by the fact that steel's elastic modulus is at least 5 000 times greater than that of PTFE.

Table B.1 - Coefficient λ for spherical bearings

θ e/L	30°	25°	20°	10°
0,00	1,000	1,000	1,000	1,000
0,01	0,982	0,981	0,980	0,979
0,02	0,962	0,961	0,960	0,958
0,03	0,942	0,940	0,938	0,936
0,04	0,922	0,919	0,916	0,913
0,05	0,901	0,898	0,894	0,890
0,06	0,880	0,876	0,872	0,867
0,07	0,858	0,853	0,849	0,844
0,08	0,836	0,831	0,826	0,820
0,09	0,814	0,808	0,803	0,796
0,10	0,792	0,786	0,780	0,773
0,11	0,770	0,763	0,757	0,749
0,12	0,747	0,740	0,733	0,724
0,13	0,725	0,717	0,710	0,700
0,14	0,702	0,693	0,686	0,676
0,15	0,680	0,670	0,663	0,653
0,16	0,657	0,647	0,639	0,628
0,17	0,635	0,624	0,616	0,604
0,18	0,612	0,601	0,592	0,581
0,19	0,590	0,578	0,569	0,557
0,20	0,567	0,556	0,546	0,533
0,21	0,545	0,533	0,523	0,510
0,22	0,523	0,511	0,500	
0,23	0,501			
0,24				
0,25				

NOTE Intermediate values may be obtained by linear interpolation

Table B.2 - Coefficient λ for cylindrical bearings

θ e/L	37,5°	30°	20°	10°
0,00	1,000	1,000	1,000	1,000
0,01	0,984	0,983	0,981	0,980
0,02	0,968	0,965	0,962	0,961
0,03	0,951	0,947	0,943	0,941
0,04	0,934	0,929	0,924	0,921
0,05	0,917	0,911	0,905	0,901
0,06	0,900	0,893	0,886	0,881
0,07	0,882	0,874	0,866	0,862
0,08	0,864	0,855	0,847	0,842
0,09	0,846	0,837	0,827	0,822
0,10	0,828	0,818	0,808	0,802
0,11	0,809	0,799	0,788	0,782
0,12	0,790	0,779	0,768	0,762
0,13	0,771	0,760	0,749	0,742
0,14	0,752	0,740	0,729	0,722
0,15	0,733	0,721	0,709	0,702
0,16	0,713	0,701	0,689	0,682
0,17	0,693	0,681	0,669	0,662
0,18	0,673	0,661	0,649	0,642
0,19	0,653	0,641	0,629	0,622
0,20	0,633	0,621	0,609	0,602
0,21	0,612	0,600	0,589	0,582
0,22	0,592	0,580	0,569	0,562
0,23	0,571	0,559	0,548	0,542
0,24	0,550	0,539	0,528	0,522
0,25	0,529	0,518	0,508	0,502
NOTE Intermediate values may be obtained by linear interpolation				

Annex ZA (informative)

Provisions for the CE marking of cylindrical and spherical PTFE bearings (with or without flat sliding elements) under the EU Construction Products Directive

ZA.1 Clauses of this European standard addressing the essential characteristics of the EU Construction Products Directive

This European Standard has been prepared under a mandate¹ given to CEN by the European Commission and the European Free Trade Association.

The clauses of this European Standard, shown in the Table ZA.1 below, meet the requirements of the mandate given under EU Construction Products Directive (89/106/EEC).

Compliance with these clauses confers a presumption of fitness of the construction products covered by this European Standard and intended uses given below.

WARNING: Other requirements and other EU Directives, not affecting the fitness for intended uses, can be applicable to the structural bearings within the scope of this annex.

Note:

In addition to any specific clauses relating to dangerous substances contained in this Standard, there may be other requirements applicable to the products falling within its scope (e.g. transposed European legislation and national laws, regulations and administrative provisions). In order to meet the provisions of the EU Construction Products Directive, these requirements need also to be complied with, when and where they apply. An informative database of European and national provisions on dangerous substances is available at the Construction web site on EUROPA (CREATE, accesses through <http://europa.eu.int>).

Tables ZA.1 - Scope and relevant clauses

Table ZA.1.a

Construction Products:		Cylindrical and spherical PTFE bearings (Figures 1 and 3) covered by the scope of this standard	
Intended uses:		In buildings and civil engineering works	
Requirements	Requirement clause(s) in this and other European Standard(s):	Mandated level(s) or class(es):	Notes:
Load bearing capacity	EN 1337-7, 4.1, 4.3 and 6.2.3	None	Design value, in kN
Rotation capability	EN 1337-7, 4.1, 4.5 and clause 5	None	Design value, in radians
Durability aspects	EN 1337-7, clause 7 EN 1337-9, clause 4	None	Pass/fail criteria

¹ M/104 "Structural bearings" as amended by M/132

Table ZA.1.b

Construction Products: Cylindrical and spherical PTFE bearings combined with flat sliding elements (Figures 2 and 4) covered by the scope of this standard			
Intended uses: In buildings and civil engineering works			
Requirements	Requirement clause(s) in this and other European Standard(s):	Mandated level(s) or class(es):	Notes:
Load bearing capacity	EN 1337-7, 4.1, 4.3 and 6.2.3	None	Design value, in kN
Rotation capability	EN 1337-7, 4.1, 4.4, and clause 5	None	Design value, in radians
Durability aspects	EN 1337-7, clause 7 EN 1337-9, clause 4	None	Pass/fail criteria
Load bearing capacity (of sliding element)	EN 1337-2:2000, clause 5, 6.8.3, 6.9	None	Design value, in kN
Coefficient of friction (of sliding element)	EN 1337-2:2000, clauses 4, 5, 6.7	None	Tabulated value (Table 11)
Durability aspects (of sliding element)	EN 1337-2:2000, clause 7 EN 1337-9, clause 4	None	Pass/fail criteria

The requirement on a certain characteristic is not applicable to those Member States where there are no regulations for such characteristic. In this case, manufacturers willing to place their products in the market of these Member States are not obliged to determine nor to declare the performance of their products with regard to this characteristic and the option "no performance determined" in the information accompanying the CE mark (see ZA.3) may be used.

The "No performance determined" (NPD) option may not be used where the characteristic is subject to a threshold level.

ZA.2 Procedures for attestation of conformity

a) For the products and intended uses listed in Table ZA.1.a) and ZA.1.b) in accordance with the European Commission Decision 95/467/EC of 24/10/1995 the systems of attestation of conformity are the following:

Table ZA.2 - Attestation of conformity systems

Product	Intended use(s)	Level(s) or class(es)	Attestation of conformity systems
Structural bearings	In buildings and civil engineering works where requirements on individual bearings are critical ^a	None	1
	In buildings and civil engineering works where requirements on individual bearings are not critical ^b		3
System 1: See annex III.2.(i), without audit testing of samples			
System 3: See annex III.2.(ii), second possibility			
^a Critical in the sense that those requirements may, in case of failure of the bearing, put the whole works or part thereof beyond those limit states regarded as serviceability and ultimate.			
^b Not critical in the sense that those requirements may not, in case of failure of the bearing, put the whole works or part thereof beyond those limit states regarded as serviceability and ultimate and there is no risk to life.			

b) The evaluation of conformity of cylindrical and spherical PTFE bearings; within the given systems of attestation of conformity shall be based on evaluation of conformity clauses of clause 8 of EN 1337-7 indicated in Tables ZA.3.a) and ZA.3.b)

Table ZA.3.a) - Assignment of tasks for the attestation of conformity of cylindrical and spherical PTFE bearings intended to be subject to critical requirements

Tasks		Content of the task	Clauses to apply
	Factory production control (F.P.C)	Parameters related to all characteristics of Table ZA.1 a)	EN 1337-7, clause 8 (only 8.2.1, 8.2.3, 8.3, 8.4 of EN 1337-2:2000)
	Further testing of samples taken at factory	All characteristics of Table ZA.1 a)	EN 1337-7, clause 8 (only 8.2.1, 8.4 of EN 1337-2:2000)
	Initial type testing	All characteristics of Table ZA.1 a)	EN 1337-7, clause 8 (only 8.2.1, 8.2.2, 8.4 of EN 1337-2:2000)
	Initial inspection of factory and of F.P.C	Parameters related to all characteristics of Table ZA.1 a)	EN 1337-7, clause 8 (only 8.2.1, 8.2.3 of EN 1337-2:2000)
	Continuous surveillance, assessment and approval of F.P.C.	Parameters related to all characteristics of Table ZA.1 a)	EN 1337-7, clause 8 (only 8.2.1, 8.2.3, 8.3, 8.4 of EN 1337-2:2000)

Table ZA.3.b) - Assignment of tasks for the attestation of conformity of cylindrical and spherical PTFE bearings intended to be subject to non critical requirements

Tasks		Content of the task	Clauses to apply
Tasks for the manufacturer	Factory production control (F.P.C)	Parameters related to all characteristics of Table ZA.1.a)	EN 1337-7, clause 8 (only 8.2.1, 8.2.3, 8.3, 8.4 of EN 1337-2:2000)
Tasks for the notified body	Initial type testing	All characteristics of Table ZA.1.a)	EN 1337-7, clause 8 (only 8.2.1, 8.2.2, 8.4 of EN 1337-2:2000)

c) The evaluation of conformity of cylindrical and spherical PTFE bearings with flat sliding elements within the given systems of attestation of conformity shall be based on the evaluation of conformity clauses of chapter 8 of EN 1337-7 and EN 1337-2:2000 indicated in Tables ZA.3.c) and ZA.3.d)

Table ZA.3.c) - Assignment of tasks for the attestation of conformity of cylindrical and spherical PTFE bearings combined with flat sliding elements intended to be subject to critical requirements

Tasks		Content of the task	Clauses to apply
	Factory production control (F.P.C)	Parameters related to all characteristics of Table ZA.1 b)	EN 1337-7, clause 8 as in/and EN 1337-2:2000, 8.2.1, 8.2.3, 8.3, 8.4
	Further testing of samples taken at factory	All characteristics of Table ZA.1 a)	EN 1337-7, clause 8 as in/and EN 1337-2:2000, 8.2.1, 8.4
	Initial type testing	All characteristics of Table ZA.1 b)	EN 1337-7, clause 8 as in/and EN 1337-2:2000, clauses 8.2.1, 8.2.2, 8.4
	Initial inspection of factory and of F.P.C	Parameters related to all characteristics of Table ZA.1 b)	EN 1337-7, clause 8 as in/and EN 1337-2:2000, 8.2.1, 8.2.3, 8.3, 8.4
	Continuous surveillance, assessment and approval of F.P.C.	Parameters related to all characteristics of Table ZA.1 b)	EN 1337-7, clause 8 as in/and EN 1337-2:2000, 8.2.1, 8.2.3, 8.3, 8.4

Table ZA.3.d) - Assignment of tasks for the attestation of conformity of cylindrical and spherical PTFE bearings combined with flat sliding elements intended to be subject to non critical requirements

Tasks		Content of the task	Clauses to apply
Tasks for the manufacturer	Factory production control (F.P.C)	Parameters related to all characteristics of Table ZA.1 b)	EN 1337-7, clause 8 as in/and EN 1337-2:2000, 8.2.1, 8.2.3, 8.3, 8.4
Tasks for the notified body	Initial type testing	All characteristics of Table ZA.1 b)	EN 1337-7, clause 8 as in/and EN 1337-2:2000, 8.2.1, 8.2.2, 8.4

d) EC Certificate and declaration of conformity

When compliance with the system of attestation of conformity is achieved:

a) for bearings under system 1, the certification body shall draw up a certificate of conformity (EC Certificate of conformity) with the information indicated below. This EC Certificate of conformity entitles the manufacturer to affix the CE marking, as described in ZA.3.

The EC Certificate of conformity shall include the following information:

- Name, address and identification number of certification body
- Name and address of the manufacturer, or his authorised representative established in the EEA and place of production,
- Description of the product (type, identification, use,...),
- Provisions to which the product conforms (e.g. annex ZA of EN 1337-7),
- Particular conditions applicable to the use of the product (e.g. provisions for the use of a bearing under certain conditions, etc),
- The certificate's number,
- Conditions and period of validity of the certificate
- Name of, and position held by, the person empowered to sign the certificate.

In addition, for each product covered by an EC Certificate of conformity, the manufacturer shall draw up a declaration of conformity (EC Declaration of conformity) including the following information:

- Name and address of the manufacturer, or his authorised representative established in the EEA,
- Number of the attached Certificate of factory production control
- Name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or of his authorised representative.

Both documents shall be presented in the official language or languages of the Member State of the EU in which the product is to be used.

b) For bearings under system 3, the manufacturer shall draw up a declaration of conformity (EC Declaration of conformity) including the following information:

- Name and address of the manufacturer, or his authorised representative established in the EEA and place of production,
- Description of the product (type, identification, use,...),
- Provisions to which the product conforms (e.g. annex ZA of prEN 1337-7),
- Particular conditions applicable to the use of the product (e.g. provisions for the use of a bearing under certain conditions, etc),
- Name and address of the approved laboratory that carried out the initial type tests.
- Name of, and position held by, the person empowered to sign the declaration on behalf of the manufacturer or of his authorised representative.

This EC Declaration of conformity entitles the manufacturer to affix the CE marking, as described in ZA.3.

This document shall be presented in the official language or languages of the Member State of the EEA in which the product is to be used.

ZA.3 CE marking

Regardless of the requirements stated in 7.3 of EN 1337-1:2000, the CE marking, the identification number of the certification body and the name or identifying mark and registered address of the manufacturer should be affixed on the bearing so that it will be visible throughout the life of the bearing. The full information given below should be in the relevant accompanying documents.

The CE conformity mark, consists exclusively of the letters "CE" in the specified form of the Directive 93/68/EC and the identification number of the notified body, where relevant.

CE marking for structural bearing products shall be accompanied by the information shown below:

- Identification number of the certification body (only for products under system 1)
- Name or identifying mark of the producer
- Registered address of the producer
- The last two digits of the year in which the marking is affixed

- Number of the EC Certificate of conformity (only for products under system 1)
- Reference to this European Standard
- Description of the product: generic name, material, dimensions,.. and intended use.
- Information on the mandated characteristics:
- Values and, where relevant, level or class to declare for each mandated characteristic as indicated in "Notes" in Table ZA.1
- As an alternative, where possible, standard designation may be given. This designation should give information on all the characteristics, if all are not covered, then values for those not covered shall be additionally given.

As example, for cylindrical and spherical PTFE bearings combined with flat sliding elements under system 1, the following information shall accompany the CE marking symbol:

<p>CE</p> <p>0123-CPD-0001</p>
<p>Any Co Ltd, PO Box 21, B-1050</p> <p>00</p> <p>0123-CPD-0456</p> <p>EN 1337-7:2000</p> <p>Cylindrical PTFE bearing combined with flat sliding element / Spherical PTFE bearing combined with flat sliding element, for minimum operating temperature of -35°C, for uses in buildings and civil engineering works where requirements on individual bearings are <u>critical</u></p> <p>BEARING Design load bearing capacity, in kN Design rotation capability, in radians Durability, pass/fail</p> <p>SLIDING ELEMENT Design load bearing capacity, in kN Coefficient of friction, tabulated value Durability, pass/fail</p>

CE conformity marking, consisting of the "CE"-symbol given in Directive 93/68/EEC.

Identification number of the certification body

Name or identifying mark and registered address of the manufacturer

The last two digits of the year in which the marking was affixed

Number of the EC certificate of conformity

No. of European standard

Identification of product and intended use

and

Information on mandated characteristics

As example, for cylindrical and spherical PTFE bearings under system 3, the following information shall accompany the CE marking symbol:

CE
Any Co Ltd, PO Box 21, B-1050 00 EN 1337-7:1999 Cylindrical PTFE bearing / Spherical PTFE bearing, for minimum operating temperature of - 35°C, for uses in buildings and civil engineering works where requirements on individual bearings are <u>not critical</u> BEARING Design load bearing capacity, in kN Design rotation capability, in radians Durability, pass/fail

CE conformity marking, consisting of the "CE"-symbol given in directive 93/68/EEC.

Name or identifying mark and registered address of the manufacturer

The last two digits of the year in which the marking was affixed

No. of European standard

Identification of product and intended use

And

Information on mandated characteristics

In addition to any specific information relating to dangerous substances shown above, the product should also be accompanied, when and where required and in the appropriate form, by documentation listing any other legislation on dangerous substances for which compliance is claimed, together with any information required by that legislation. Note: European legislation without national derogations need not be mentioned.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001. Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.