

Office furniture — Tables and desks and storage furniture — Test methods for the determination of strength and durability of moving parts

The European Standard EN 14074:2004 has the status of a
British Standard

ICS 97.140

National foreword

This British Standard is the official English language version of EN 14074:2004.

The UK participation in its preparation was entrusted to Technical Committee FW/0, Furniture, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN title page, pages 2 to 20, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 8 November 2004

© BSI 8 November 2004

ISBN 0 580 44738 3

English version

Office furniture - Tables and desks and storage furniture - Test
methods for the determination of strength and durability of
moving parts

Mobilier de bureau - Tables de travail de bureau et meubles
de rangement - Méthodes d'essai pour la détermination de
la résistance et de la durabilité des parties mobiles

Büromöbel - Büro-Arbeitstische und Büroschränke -
Prüfverfahren für die Bestimmung der Festigkeit und der
Dauerhaltbarkeit beweglicher Teile

This European Standard was approved by CEN on 27 May 2004.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

	page
Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions	4
4 General test conditions	4
4.1 Preliminary preparation	4
4.2 Test equipment	5
4.3 Tolerances	5
4.4 Sequence of testing.....	5
5 Test apparatus	6
5.1 Obstacles for rolling test	6
5.2 Floor surface	6
5.3 Wall Surface	6
5.4 Stops	6
5.5 Masses	6
5.6 Glass marbles	6
5.7 Loading pad.....	6
5.8 Apparatus for slam open/shut of extension elements.....	6
6 Test methods.....	7
6.1 Determination of loading of storage parts	7
6.2 Extension elements	7
6.2.1 Strength of extension elements	7
6.2.2 Durability test of extension elements.....	8
6.2.3 Slam open of extension elements.....	9
6.2.4 Interlock test.....	9
6.3 Hinged or pivoted doors	9
6.3.1 Vertical load on doors	9
6.3.2 Horizontal static force on open door	10
6.3.3 Durability test on hinged and pivoted doors	11
6.4 Sliding doors and horizontal roll fronts	12
6.4.1 Durability test of sliding doors and horizontal roll fronts	12
6.4.2 Slam shut/open of sliding doors and horizontal roll fronts	13
6.5 Vertical roll fronts	14
6.5.1 Durability of vertical roll front	14
6.6 Flaps.....	14
6.6.1 Strength of flaps	14
6.6.2 Durability of flaps.....	15
6.7 Rolling test for mobile filing pedestals.....	15
7 Test report	16
Annex A (informative) Apparatus for slam open and shut test of extension elements	17
A.1 Slam open test with pneumatic actuator.....	17
A.1.1 Principle.....	17
A.1.2 Apparatus	17
A.1.3 Calibration	17
A.2 Slam open test with weight and string	19
A.2.1 Slam open test	19
Bibliography	20

Foreword

This document (EN 14074:2004) has been prepared by Technical Committee CEN/TC 207 "Furniture", the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2005, and conflicting national standards shall be withdrawn at the latest by February 2005.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard : Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

1 Scope

This document specifies test methods for the determination of strength and durability of moving parts of desks, tables and storage furniture.

This document does not apply to high density mechanized filing systems, rotary filing systems or plan files.

The tests are intended to simulate normal functional use, as well as misuse that might reasonably be expected to occur.

Safety requirements can be found in EN 14073-2.

Assessment of ageing is not included.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Not applicable – no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

catch device

device, which keeps or pulls a component in place, but does not require a second action in order to release it, e.g. a magnetic catch or a self-closing-mechanism

3.2

locking mechanism

mechanism that limits access to the interior of a unit or a storage element. It requires a key or a combination in order to operate it or to make it possible to operate it.

4 General test conditions

4.1 Preliminary preparation

The tests specified in this Standard are designed to be applied to an item of furniture that is fully assembled and ready for use.

The tests refer to furniture parts with conventional functions. Combination of tests may be necessary to cover the properties of multi-function parts, e.g. a shelf that can be pulled out on runners shall be tested for strength of shelf supports as well as for strength as an extension element.

Before any of the tests are commenced, the item shall be old enough to ensure that it has developed its full strength.

The furniture shall be tested as delivered. Ready to Assemble furniture shall be assembled according to the instructions supplied with it. If the furniture can be assembled or combined in different ways, the most adverse combination shall be used for each test. This is also applicable to units that can be combined with other units or components.

Wall or screen mounted units shall be installed according to the manufacturers instructions.

Free standing units shall be placed on the floor surface (5.2) with stops (5.4) around each leg or base.

The tests shall be carried out in indoor ambient conditions but, if during a test, the atmosphere temperature is outside the range 15 °C to 25 °C, the maximum and/or minimum temperature shall be recorded in the test report.

Tighten any assembly fittings before testing. Further re-tightening shall not take place unless it is specifically required by the manufacturer.

4.2 Test equipment

The forces in the static load tests shall be applied sufficiently slowly to ensure that the influence of dynamic load is negligible. Unless otherwise stated, the static loads shall be maintained for (10 ± 2) s.

The forces in durability tests shall be applied sufficiently slowly to ensure that heating does not occur. Unless otherwise stated, the durability loads shall be maintained for (2 ± 1) s.

Unless otherwise specified, the tests may be applied by any suitable device because results are dependent only upon correctly applied loads and not upon the apparatus.

The test equipment shall be capable of following the deformations that may occur during the tests.

4.3 Tolerances

Unless otherwise stated:

- forces shall have an accuracy of $\pm 5\%$ of the nominal force;
- dimensions an accuracy of $\pm 1,0$ mm of the nominal dimension;
- masses an accuracy of $\pm 0,5\%$ of the nominal mass;
- velocities an accuracy of $\pm 5\%$ of the nominal velocity;
- angles an accuracy of $\pm 2^\circ$ of the nominal angle.

The accuracy for the position of loading pads shall be ± 5 mm.

The relationship $10\text{N} = 1$ kg may be used.

4.4 Sequence of testing

The tests shall be carried out on the same unit. The tests shall be carried out on the same part and in the specified sequence, but it is not necessary to test the different parts of the item in the sequence of the clauses.

For any unit fitted with more than one flap, door or extension element that is identical in every respect excluding the direction of opening, it is only necessary to test one of the relevant flaps, doors or extension elements. For an item fitted with flaps, doors or extension elements which are not identical, the flap, door or extension element producing the most adverse conditions shall be tested.

5 Test apparatus

5.1 Obstacles for rolling test

Steel strips, 50 mm wide and 2 mm high with the edges having a radius of 2 mm, 500 mm apart and parallel on the floor surface and perpendicular to the test direction..

5.2 Floor surface

A rigid, horizontal and flat surface.

For the rolling test, a horizontal smooth steel surface.

5.3 Wall Surface

A rigid, vertical and flat surface.

5.4 Stops

Devices to prevent the unit from sliding no higher than 12 mm except in cases where the design of the unit necessitates the use of higher stops, in which case the lowest that will prevent the item from sliding shall be used.

5.5 Masses

Masses shall not reinforce the structure or redistribute the stresses.

If bags with metal shots etc. are used they shall be divided into small compartments to prevent the contents from moving during the tests.

Loads shall be evenly distributed unless otherwise stated.

Suspended pocket files shall be loaded with typing paper or a suitable representation of it and where applicable pocket files shall be oriented in the most adverse direction.

5.6 Glass marbles

Glass marbles between 10 mm and 15 mm in diameter shall be used for the slam open test for extension elements described in (6.2.3). They shall be in a flexible bag large enough to allow them to move freely during the test.

5.7 Loading pad

A rigid cylindrical object 100mm in diameter (or 50 mm in diameter to be used in limited space), having a flat face with 12 mm radius on the edge.

5.8 Apparatus for slam open/shut of extension elements

Apparatus as well as calibration instructions are given in annex A.

6 Test methods

6.1 Determination of loading of storage parts

The volume of extension elements shall be taken as the area of the bottom of the extension element multiplied by the clear height. The clear height is the distance between the top surface of the bottom of the extension element and the lower edge of the front of the extension element of the extension element above, or the structure of the unit.

All parts intended for storage purposes shall be uniformly loaded according to Table 1 unless otherwise specified by the manufacturer.

Table 1 — Loading of storage parts

Part	Load	
Shelves	kg/dm ²	1,5
Clothes Rails	kg/dm	5,0
Extension elements	kg/dm ³	0,5
Suspended pocket files	kg/dm a)	4,0
a) Measured perpendicular to the suspended pocket file.		

Further loads shall be placed on top of free standing units if this is necessary to prevent tilting.

6.2 Extension elements

6.2.1 Strength of extension elements

Load the extension element according to 6.1.

Open the extension element to its open stops. If it is not fitted with open stops, and is intended to be taken out, open it to the point at which one-third of its inside length (depth) remains inside the unit, see figure 1.


Apply a vertical force equal to the total mass of the extension element up to a max of 250 N to one top front corner, see figure 1. The total mass is the weight of the extension element plus the load specified in 6.1.

If the extension element is forced out of the unit it shall be re-assembled if necessary and returned to the unit. This shall be recorded in the report.

Carry out the test ten times.

Before and after the test, inspect the function of the extension element (including the opening and closing forces if required).

Dimensions in millimetres

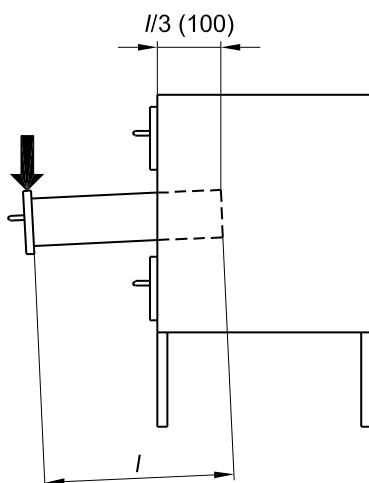**Figure 1 — Strength of extension elements****6.2.2 Durability test of extension elements**

Load the extension element according to 6.1.


Open and close the extension element without vertical and horizontal support, over its full distance of travel, without forcing the stops, for 50 000 cycles. The recommended rate is maximum 6 cycles per minute.

If an extension element is not equipped with open stops, open it from the fully closed position to the point at which one-third of the inside length (depth) of the extension element remains inside the unit, see figure 2.

The operating force shall be applied at the level intended in normal use (i.e. the extension element handle) or, in case of two handles, in the middle between the handles. Ensure that no downwards force is applied to the extension element runners when closing the extension element.

Before and after the test, inspect the appearance and function of the extension element and runners (including the opening and closing force if required).

Dimensions in millimetres

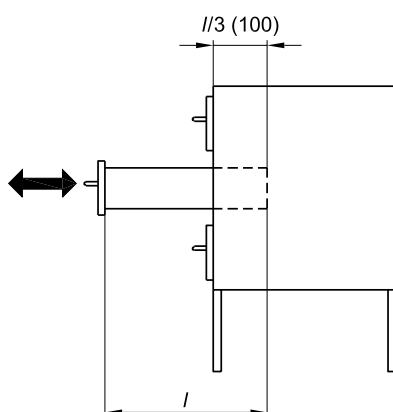**Figure 2 — Durability test of extension elements**

6.2.3 Slam open of extension elements

Place the extension element on its runners and load it according to 6.1 with glass marbles (5.6) or in case of suspended pocket files, with typing paper or a suitable representation of it (5.5). Close the extension element to a position 300 mm from the fully open position (or fully close the extension element if the travel is less than 300 mm).

Testing shall be carried out with an apparatus working according to one of the two methods specified in A.1 and A.2 in Annex A.

The calibration slam open velocities shall be 1,3 m/s for a 5 kg extension element and 1,0 m/s for a 35 kg extension element (see A.1.3).

Apply the force on the centreline of the extension elements front or back at the same level as the handle.

The slamming force shall be applied until 10 mm before the extension elements reaches its end travel.

Slam the extension elements open 10 times.

Before and after the test, inspect the appearance and function of the extension element and runners (including the opening and closing force if required)

6.2.4 Interlock test

When interlocks are fitted, one extension element shall be fully extended and an outward force of 200 N shall be applied to the handles of each of the remaining extension elements one at a time.

The test shall be carried out a total of 10 times on each element. Record if the extension elements are retained closed.

6.3 Hinged or pivoted doors

6.3.1 Vertical load on doors


Load the door as shown in figure 3 with a mass of 30 kg placed 100 mm from its outer edge.

Swing the door 10 full cycles (back and forth) from a position 45° from fully closed to a position 10° from fully opened, but to a maximum of 135°. The recommended rate is maximum 6 cycles per minute.

Opening and closing can be done by hand using 3 sec. to 5 sec. for opening and 3 sec. to 5 sec. for closing.

Before and after the test, inspect the appearance and function of the door (unloaded) after using any adjustment provided.

Dimensions in millimetres

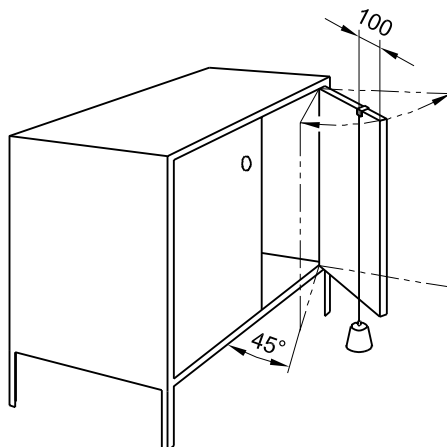**Figure 3 — Vertical load on doors****6.3.2 Horizontal static force on open door**

This test is only applicable to doors having a maximum opening angle of 135° or less.

Apply a horizontal static force of 80 N to the fully opened door perpendicular to the plane of the door on its horizontal centre line 100 mm from the outer edge of the door in the direction of the opening, (see figure 4). Apply the load 10 times.

Before and after the test, inspect the appearance and function of the unloaded door after using the adjustment provided.

Dimensions in millimetres

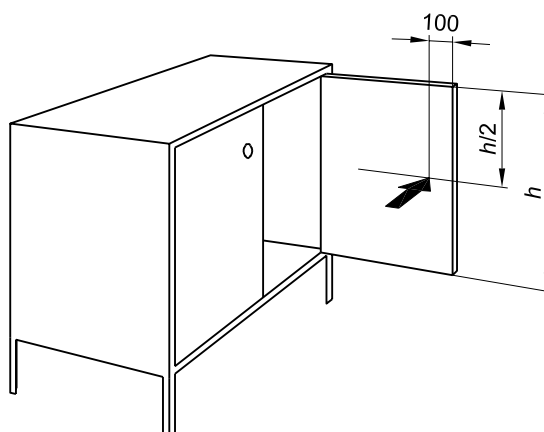


Figure 4 — Horizontal static force on open door


6.3.3 Durability test on hinged and pivoted doors

Attach a mass of 2 kg (see figure 5) equally distributed on both sides of the door on the vertical center line.

Fully open the door to a maximum of 135° and close it for 50 000 cycles (back and forth) without forcing built-in stops in the open position. The recommended rate is maximum 6 cycles per minute.

Any door closing catch mechanism fitted shall be operated at every cycle. This does not include locking mechanisms.

Before and after the test, inspect the appearance and function of the unloaded door after using any adjustment provided.

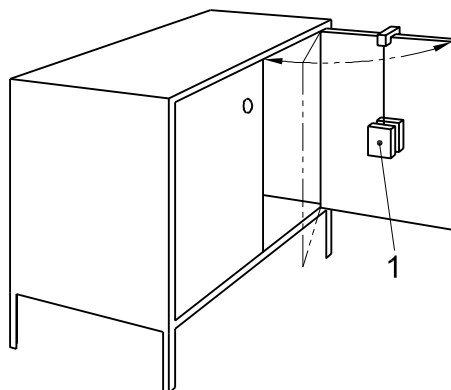

Key

1 2 x 1Kg

Figure 5 — Durability test on hinged and pivoted doors

6.4 Sliding doors and horizontal roll fronts

6.4.1 Durability test of sliding doors and horizontal roll fronts

Using the handle, open and close the sliding door 40 000 cycles, or for roll fronts 20 000 cycles from the fully closed position to a position 50 mm from the fully opened position (see figure 6). The recommended rate is maximum 6 cycles per minute.

If the door/roll front has a catch mechanism, it shall be operated at every cycle. This does not include locking mechanisms.

Before and after the test, inspect the appearance and function of the sliding door or roll front (including the opening and closing force, if required).

Dimensions in millimetres

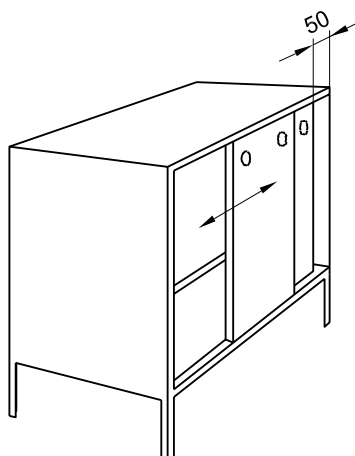


Figure 6 — Durability test of sliding doors and horizontal roll fronts

6.4.2 Slam shut/open of sliding doors and horizontal roll fronts


The sliding door or roll front shall be opened/closed by means of a cord attached to the centre of the handle. If the handle has a length greater than 200mm, the cord shall be attached 100mm below the top of the handle up to a maximum height from the floor of 1 200mm.

Determine the mass w , required to just move the door. The test weight shall be 4 kg plus the mass w .

Start the movement 300 mm from the closed/opened positions respectively. The test force shall be removed 10 mm before the sliding door/roll front is fully closed/opened. The test shall be carried out as shown in figure 7.

Close/open the door/roll front 10 times towards the fully closed/opened positions using the test mass.

Before and after the test, inspect the appearance and function of the door/roll front and runners (including the opening and closing force, if required).

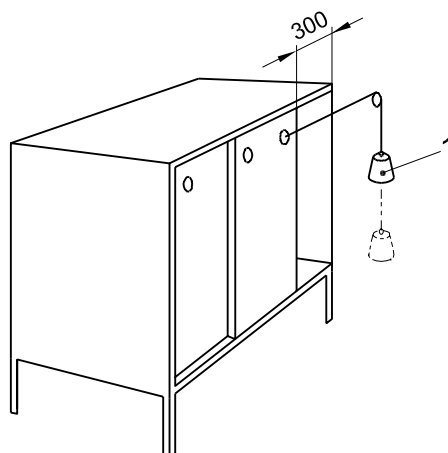**Key**

1 $W + 4\text{Kg}$

Figure 7 — Slam shut/open of sliding doors and horizontal roll fronts

6.5 Vertical roll fronts

6.5.1 Durability of vertical roll front

Open and close the roll front fully 20 000 cycles. The recommended rate is maximum 6 cycles per minute.

If the roll front has a catch mechanism, it shall be operated at every cycle. This does not include locking mechanisms.

Before and after the test, inspect the appearance and function of the roll front and runners (including the opening and closing forces, if required).


6.6 Flaps

6.6.1 Strength of flaps

With the flap in its fully opened/extended position, apply a downward static force of 250 N using the loading pad (5.7) 10 times, 50 mm from the weakest corner (see figure 8).

Inspect the unit before and after the test.

Dimensions in millimetres

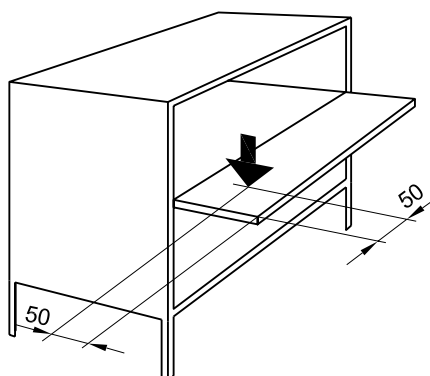**Figure 8 — Strength of flaps****6.6.2 Durability of flaps**

Open and close the flap fully 20 000 cycles. The recommended rate is maximum 6 cycles per minute.

If the flap has a catch mechanism, it shall be operated at every cycle. This does not include locking mechanisms.

When the flap is fitted with an adjustable friction stay it shall be adjusted so that the flap will just open under its own weight and re-adjusted not more than 10 times during the test.

Before and after the test, inspect the appearance and function of the flaps, hinges etc. re-adjusting, if possible and taking note of whether a friction stay will allow a flap to just open under its own weight.

If required, measure the braking force of any friction stay before and after the test.

6.7 Rolling test for mobile filing pedestals

This test is only applicable to mobile filing pedestals.

Load the unit as specified in 6.1.

At least one castor shall be run over two obstacles (5.1) at a mean speed of 0,5 m/s for a distance of one meter. At the end of one meter the direction of travel shall be reversed and the castor shall return to the starting point. This cycle shall be repeated until the castors have been running for 2 minutes.

There shall then be a cooling period of 2 minutes before the next 2 minute test run is started.

The procedure shall be repeated until 2 000 cycles have been completed. One cycle consists of one movement to and fro.

Inspect the castors and the structure for damage affecting function immediately after testing and after a recovery period of 24 hours.

7 Test report

The test report shall include at least the following items:

- a) number of this document;
- b) details of the piece of furniture tested;
- c) manner of installation if appropriate;
- d) any defects observed before testing;
- e) test results according to the applicable clauses;
- f) details of any deviations from this document;
- g) name and address of the test facility;
- h) date of test.

Annex A

(informative)

Apparatus for slam open and shut test of extension elements

A.1 Slam open test with pneumatic actuator

A.1.1 Principle

Lightweight (empty) extension elements are slammed at consistently higher speeds than heavy (full) extension elements, but friction does not significantly affect the slamming speed.


Standard 'empty' (5 kg) and 'full' (35 kg) extension elements with minimal friction are used to simulate these conditions. Using these extension elements the speed of the extension element slamming apparatus is adjusted to the slamming velocities specified.

A.1.2 Apparatus

A suitable apparatus for slam shut tests of extension elements consists of a pneumatically actuated low-friction piston/cylinder with a means of regulating the pressure of air supplied from a reservoir. The air-flow between the piston/cylinder and the reservoir is controlled by an air-operated valve which allows the air stored in the reservoir to be connected to the piston/cylinder rapidly, when the control valve is operated. This rate of flow is controlled by the incorporation of connecting tubing of specified bores and lengths. (See figure A.1).

A.1.3 Calibration

Using two standard extension elements, having masses of 5kg and 35kg respectively, and exhibiting a total frictional force in the runners of not greater than 10N, calibrate the apparatus to produce the closing and opening velocities specified in 6.2.3.

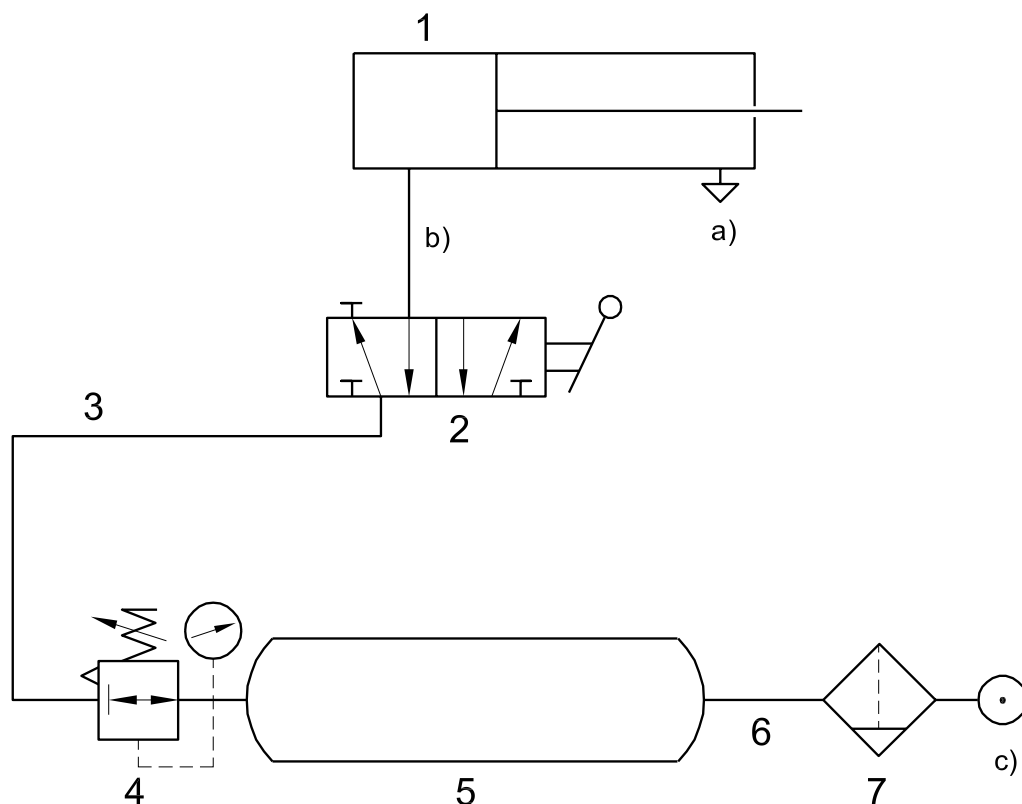

Key

- 1) Cylinder (diameter 40mm, stroke 300mm)
- 2) Valve 1/4"(nominal air flow > 900 l/min)
- 3) Tube (bore 6 mm, length 720mm)
- 4) Pressure regulator (nominal air flow > 900 l/min)
- 5) Air reservoir (radius 37,5mm; length 350mm; volume 1,545 6 cm³)
- 6) Tube (bore 3mm, length 1040mm)
- 7) Air cleaner (nominal air flow > 900 l/min)

- a) Free outlet
- b) Valve to be mounted directly on cylinder
- c) Primary pressure 6 KPa

Figure A.1 — Circuit diagram for pneumatic extension element slamming apparatus

A.2 Slam open test with weight and string

A.2.1 Slam open test

The extension element shall be opened by a hanging weight (m) that is attached to the extension element by means of a string or cord. The force exerted by the weight is removed 10 mm before the extension element reaches its end stops. The movement is started 300 mm from fully opened position.

Dimensions in millimetres

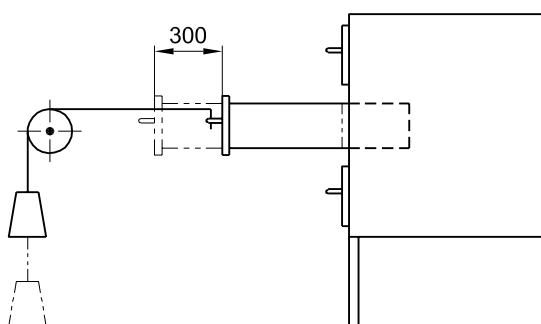


Figure A.2 — Extension element-slamming apparatus with hanging weight

The mass (m) of the hanging weight is calculated by the following formula

$$m = 2,5 \times \sqrt[3]{M}$$

M is the total mass of the extension element.

The slam velocity after a travel distance of 300 mm will be equal to the slam velocity exerted by the pneumatic slamming apparatus of A.1 calibrated 1,3 m/s for 5 kg and 1,0 m/s for 35 kg.

Bibliography

- [1] EN 14073-2,. *Office furniture - Storage furniture - Part 2: Safety requirements*

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.