



波纹手轮

GB 4141.23—84

Sinuate handwheels

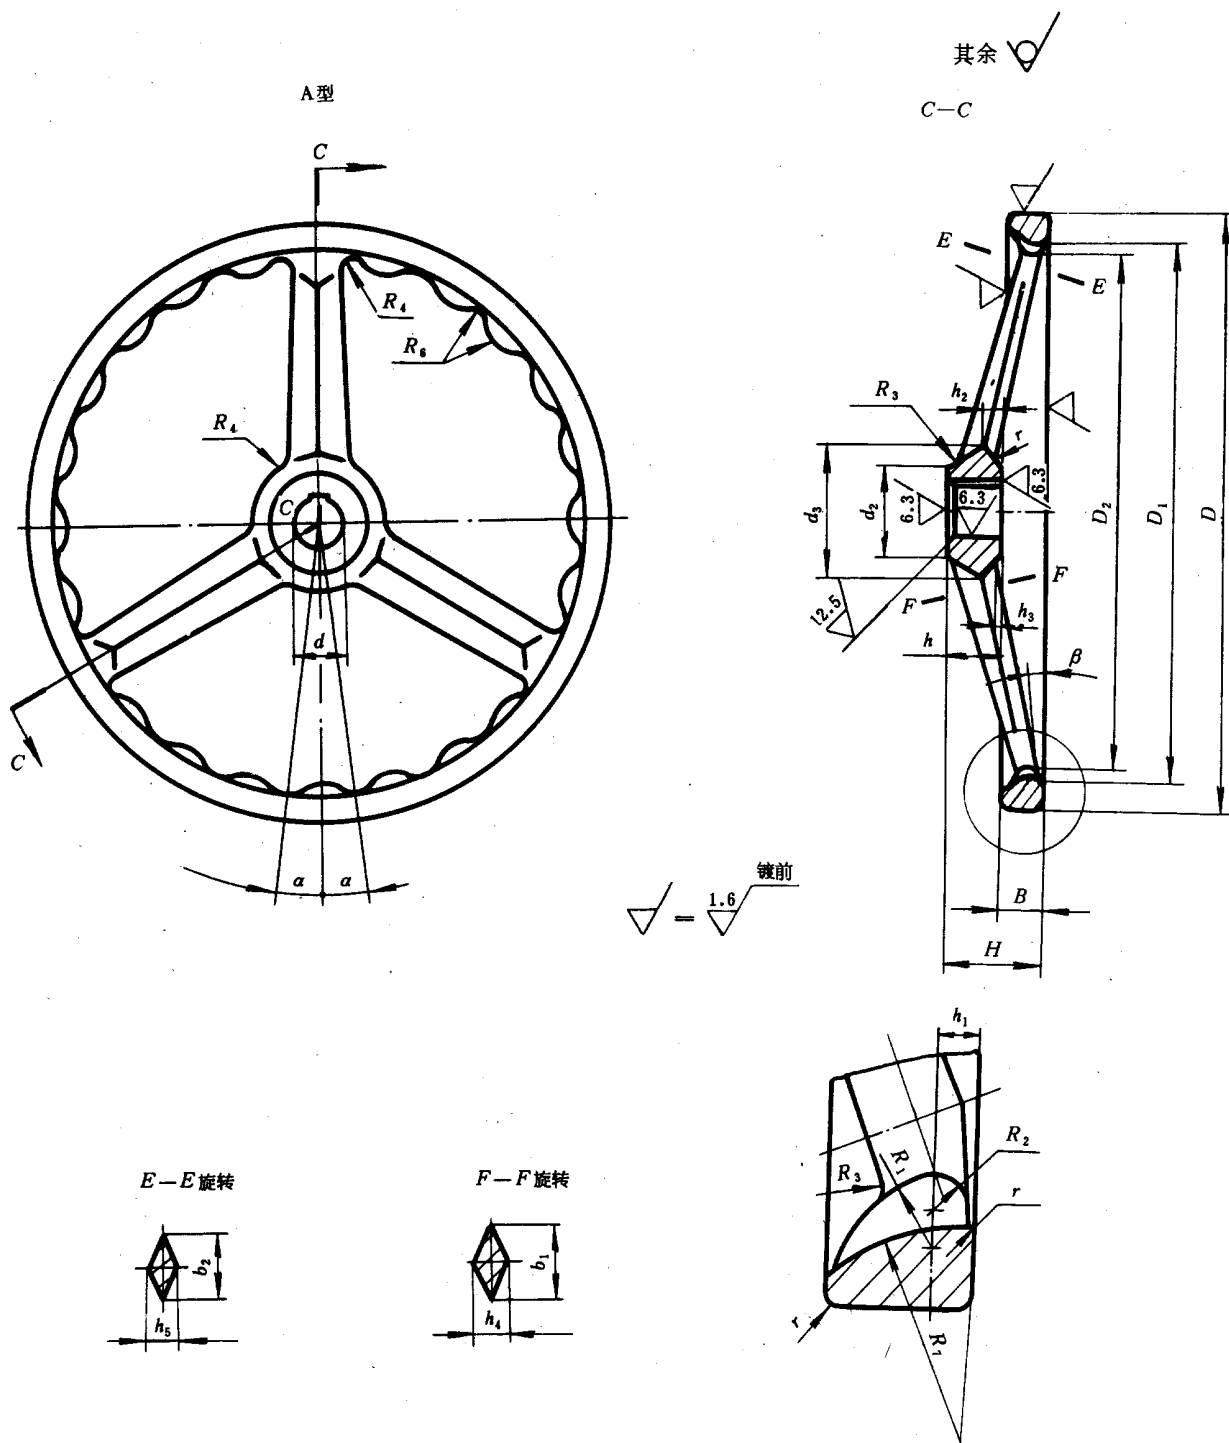

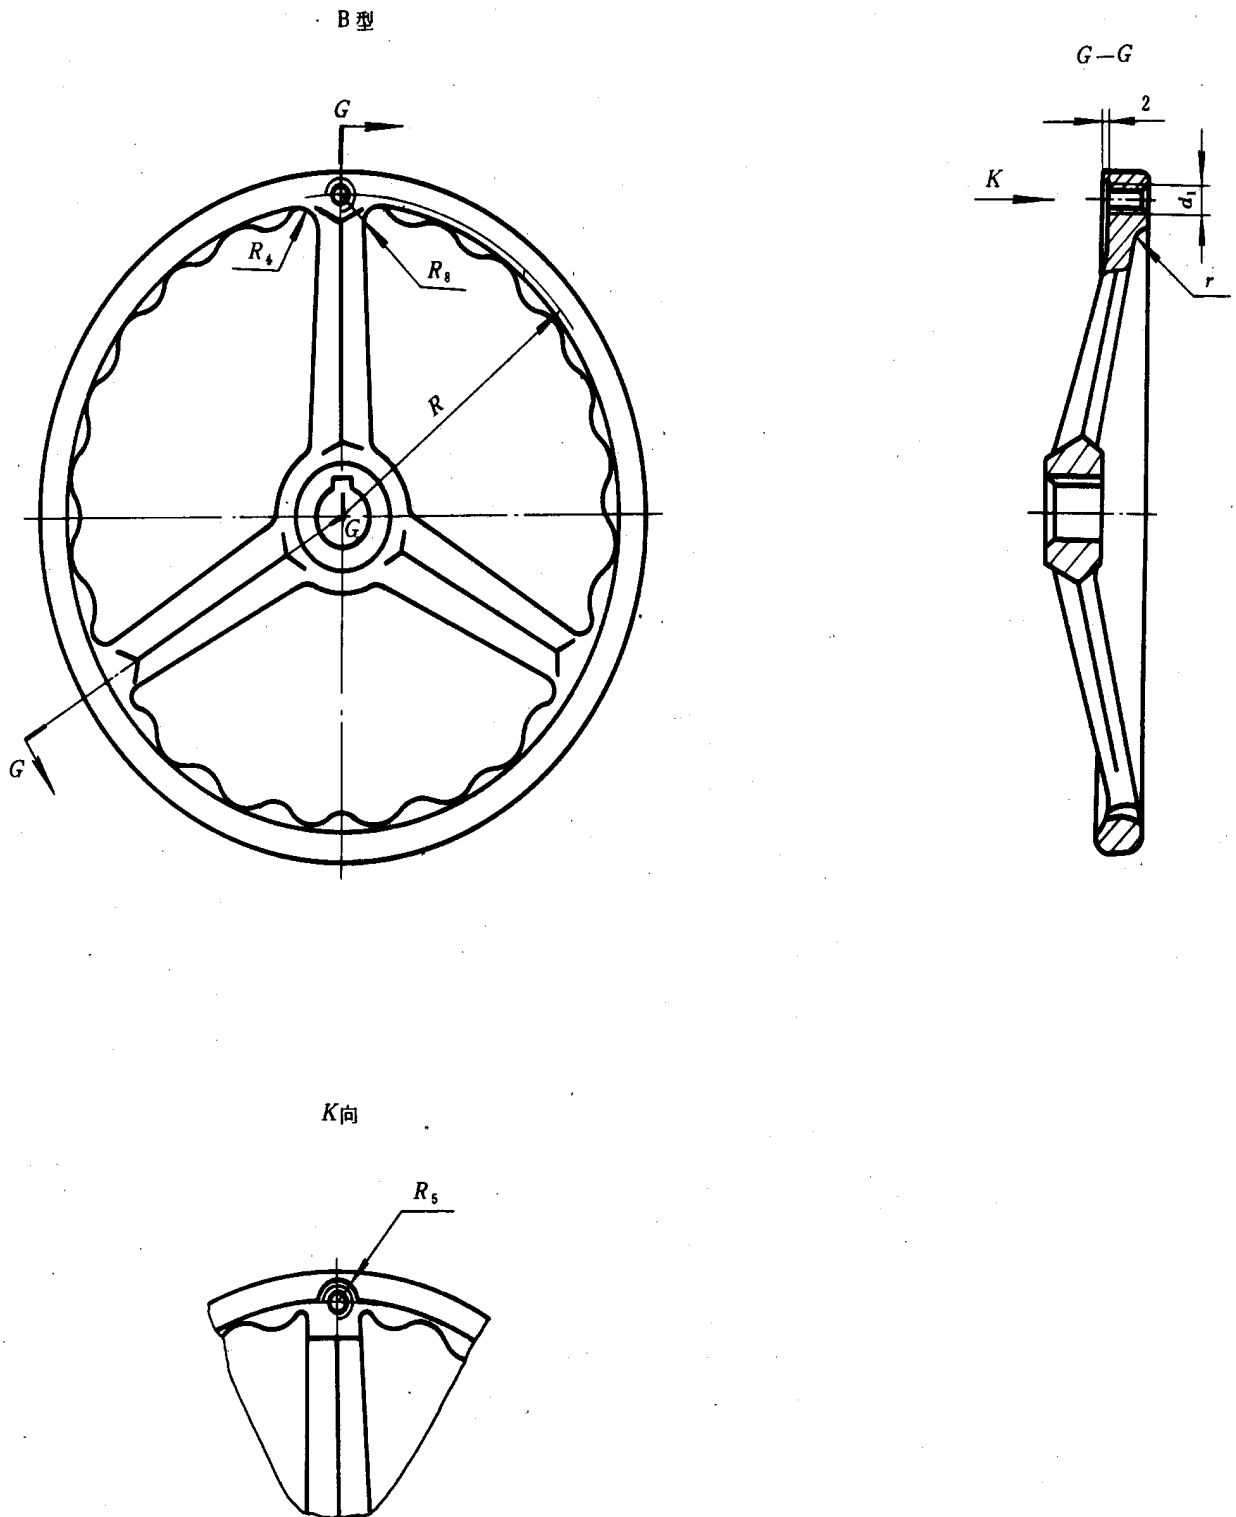

标记示例:

波纹手轮 A 型 $d = 18$ $D = 200$ 喷砂镀铬: 手轮 18×200 GB 4141.23—84

B 型 $d = 18$ $D = 200$ 喷砂镀铬: 手轮 B 18×200 GB 4141.23—84

GB 4141.23—84

mm									
d	基本尺寸	18	22	25	28	32	35	40	45
	极限偏差 H8	+0.027 0	+0.033 0			+0.039 0			
	D	200	250	320		400	500	630	
	D ₁	176	222	288		364	462	588	
	D ₂	164	210	276		352	448	574	
	d ₁	M10	M12			—			
	d ₂	36	45	55		65	75	85	
	d ₃	48	58	72		85	95	105	
	R	88	110	145		—	—	—	
	R ₁	20	22	23		26	28	32	
	R ₂	5					6		
	R ₃	6	8	10		12	16		
	R ₄	5	6			8			
	R ₅	8	10			—			
	R ₆ ~	16	16.5	16			20		
	R ₇	30	29	30		30	34	36	
	R ₈	10	12			—			
	r	2				2.5			
	H	45	50	55		65	70	75	
h	基本尺寸	25	28	32		40	45	50	
	极限偏差h13	0 -0.33			0 -0.39				
	h ₁	6					7		
	h ₂	8	9	10		12	14	16	
	h ₃	2				3		5	
	h ₄	14	18	20		22	24	26	
	h ₅	12	14	16		18		20	
	B	20	22	24		26	28	30	
	b ₁	26	30	35		38	42	45	
	b ₂	20	24	28		30	32	35	
	β	10°			5°	—			
	α	12°30′	10°	7°30′		6°	5°	4°	
	轮辐数	3				5			
	每件重量kg~	2.027	3.150	5.730		8.693	12.631	21.615	
	转动手柄GB 4141.5—84	M10×80	M12×100			—			

1. 材料: HT20—40。
2. 表面处理: 喷砂镀铬 (PS/D·Cr); 镀铬抛光 (D·L₃ Cr)。
3. 其他技术要求按 GB 4141.33—84《操作件技术条件》。