



圆轮缘手轮

GB 4141.24-84


Disc handwheels

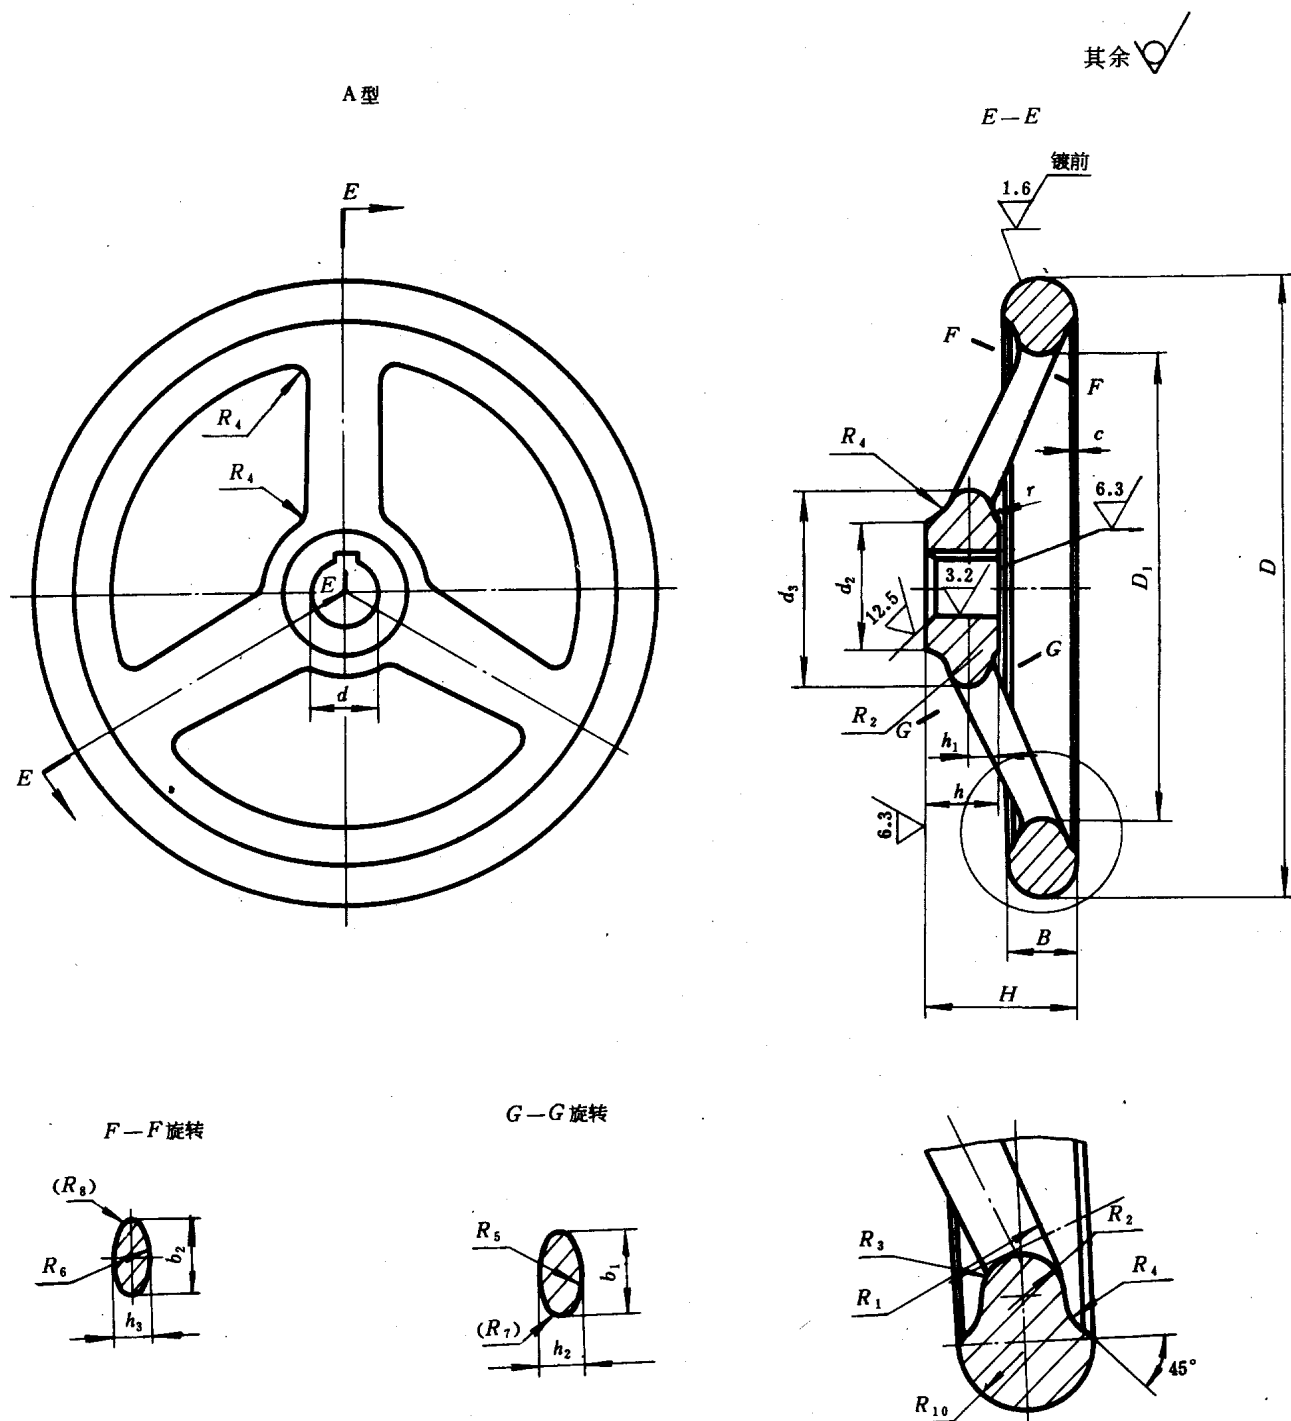


B 型

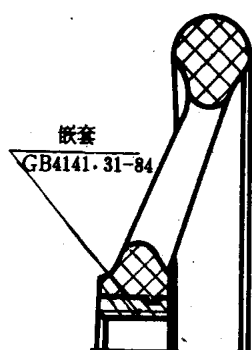


C 型

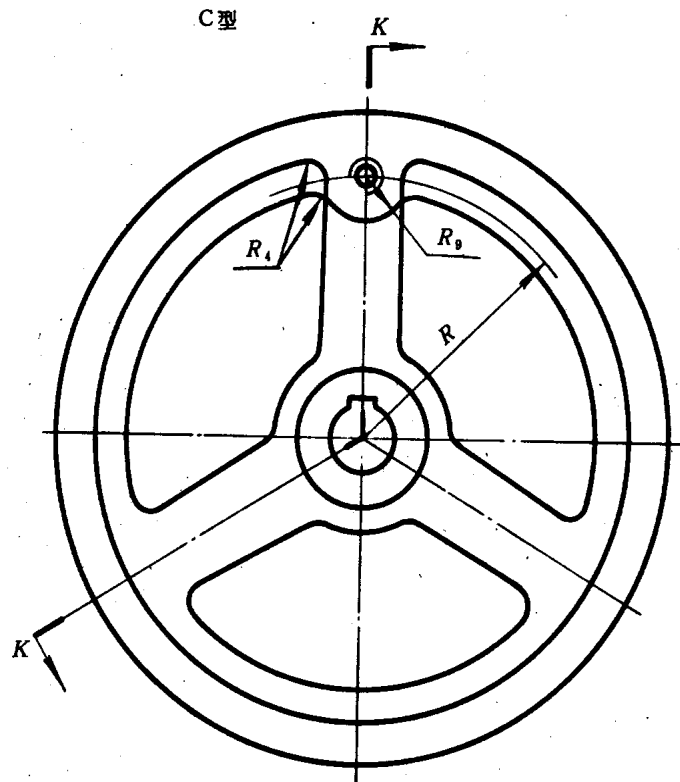

K-K

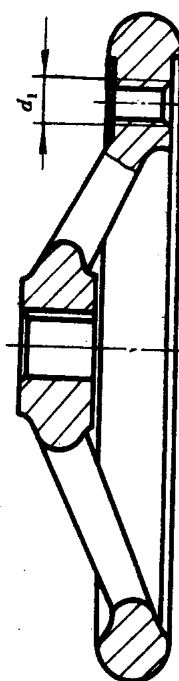

D 型

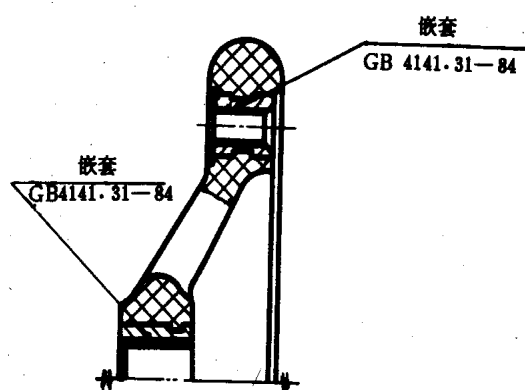

圆轮缘手轮	A型	$d = 16$	$D = 160$	材料	HT20-40	喷砂镀铬:	手轮	16×160	GB	4141.24-84
	B型	$d = 16$	$D = 160$	材料	塑料:		手轮	$B 16 \times 160$	GB	4141.24-84
	C型	$d = 16$	$D = 160$	材料	HT20-40	喷砂镀铬:	手轮	$C 16 \times 160$	GB	4141.24-84
	D型	$d = 16$	$D = 160$	材料	塑料:		手轮	$D 16 \times 160$	GB	4141.24-84

mm

d	基本尺寸	12	14	16	18	22	25	28	32	35	40	45	
	极限偏差 H 8	+ 0.027 0				+ 0.033 0			+ 0.039 0				
D		100	125	160	200	250	320	400	500	630			
D ₁		64	87	120	156	200	264	336	428	550			
d ₁		M 8		M 10		M 12		—					
d ₂		26	28	32	36	45	55	65	75	85			
d ₃		30	39	44	50	61	73	85	97	109			
R		36	47	62	80	101	132	—	—	—			
R ₁		14		18	22	—							
R ₂		5		5.5	6	7	8	9	10	11			
R ₃		12		16	20	24	28	45	65	75			
R ₄		3		3.5	4			5	6	7			
R ₅		20		22	24	28	32	36	40	44			
R ₆		16		18	20	22	24	28	32	36			
R ₇ ≈		3.5		4.1	4.5	5.3	6	6.8	7.5	8.3			
R ₈ ≈		2.8		3.4	3.7	4.1	4.5	5.3	6	6.8			
R ₉		7.5	8	10		12		—					
R ₁₀		7.5	8	9	10	11	12.5	14	16	18			
r		1			1.6		2		3.5				
H		33	36	40	45	50	56	64	72	78			
h	基本尺寸	17	18	20	25	28	32	40	45	50			
	极限偏差 h 13	0 - 0.270		0 - 0.330			0 - 0.390						
h ₁		6	7	8	9	10	11	12	14	16			
h ₂		9	10	11	12	14	16	18	20	22			
h ₃		7	8	9	10	11	12	14	16	18			
B		15	16	18	20	22	25	28	32	36			
b ₁		18	20	22	24	28	32	36	40	44			
b ₂		14	16	18	20	22	24	28	32	36			
c		0.6		0.8	1		1.5			2			
轮辐数		3						5					
B 型	嵌套	C 12×18		C 16×20	C 18×25	—							
D 型	GB 4141.31—84	C 12×18		C 16×20	C 18×25	—							
		B M 8×14		B M 10×16									
每件重量	铸铁	0.935		1.460	2.200	3.494	5.753	9.342	15.000	23.061			
kg≈	塑料	0.187		0.292	0.440	0.699	—						
转动手柄		M 8×63		M 10×80		M 12×100		—					
GB 4141.5—84		M 8×63		M 10×80		M 12×100		—					

GB 4141.24-84

1. 材料: HT20-40; 塑料。
2. 表面处理: HT20-40为喷砂镀铬 (PS/D·Cr); 镀铬抛光 (D·L, Cr)。
3. 其他技术要求按GB 4141.33-84《操作件技术条件》。