



波纹圆轮缘手轮

GB 4141.25—84

Sinuate disc handwheels

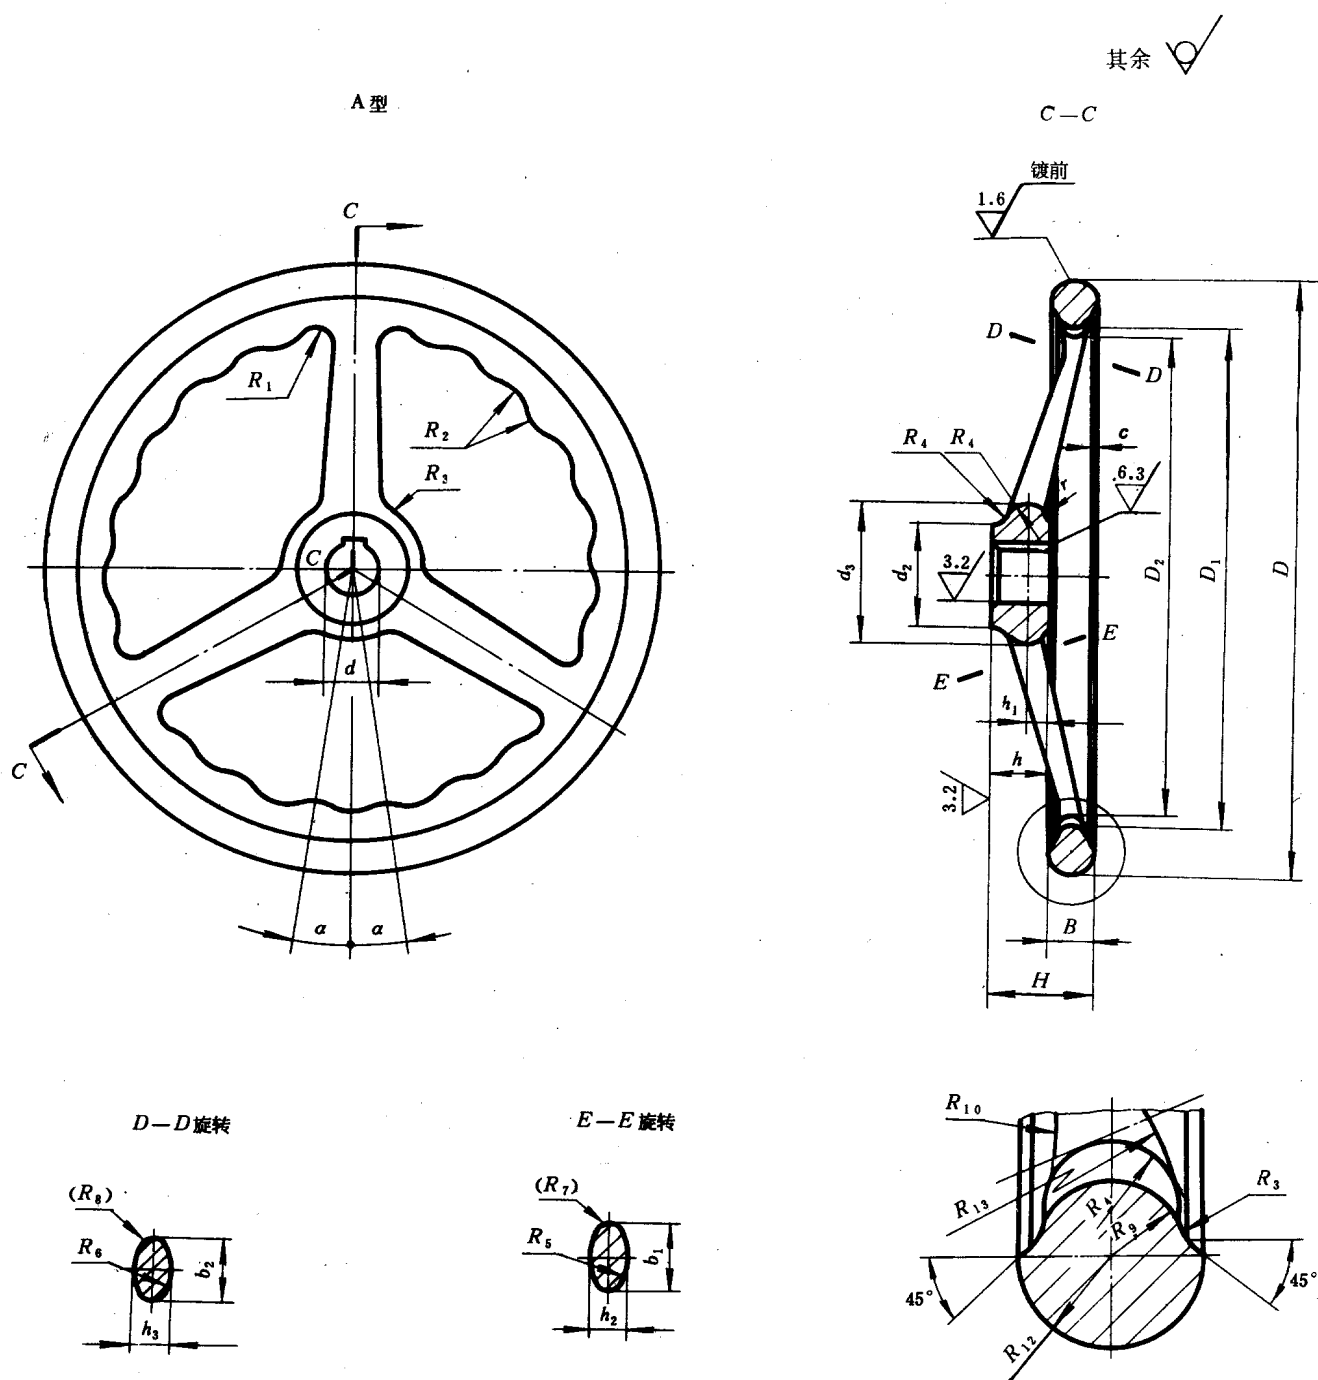

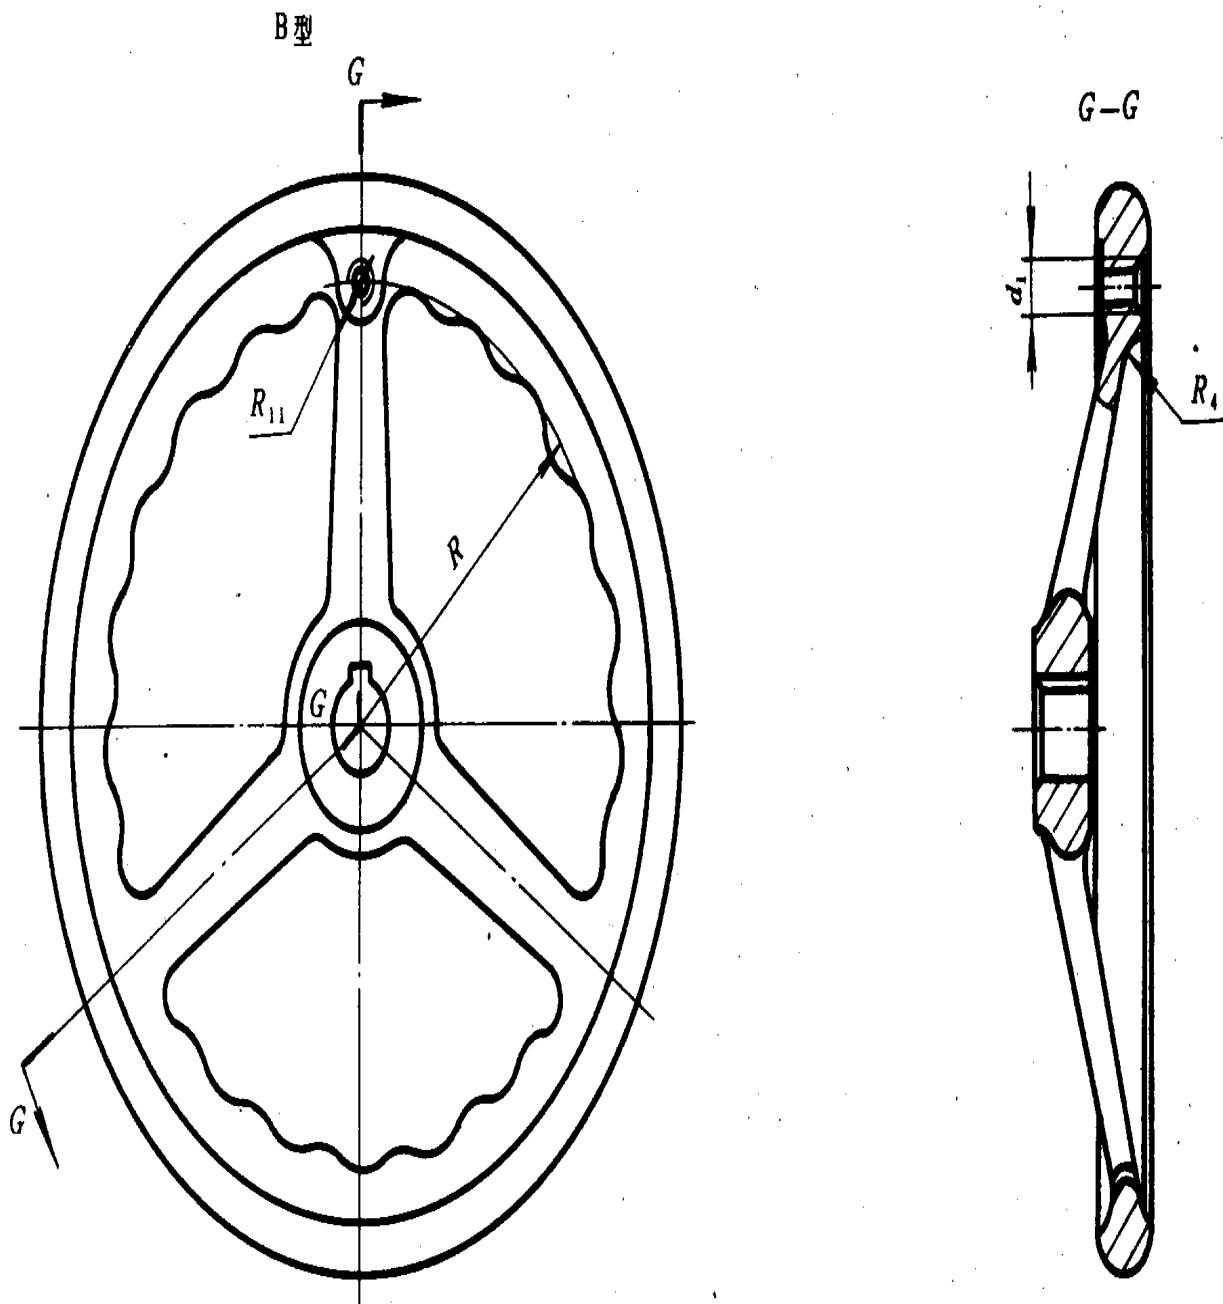

标记示例:

波纹圆轮缘手轮 A型 $d=28$ $D=320$ 喷砂镀铬: 手轮 28×320 GB 4141.25-84

B型 $d=28$ $D=320$ 喷砂镀铬: 手轮 $B28 \times 320$ GB 4141.25-84

GB 4141.25—84

mm									
d	基本尺寸	18	22	25	28	32	35	40	45
	极限偏差 H8	+0.027 0	+0.033 0			+0.039 0			
	D	200	250	320		400	500	630	
	D ₁	168	209	264		336	428	550	
	D ₂	160	200	254		324	414	534	
	d ₁	M 10	M 12			—	—	—	
	d ₂	36	45	55		65	75	85	
	d ₃	50	61	73		85	97	109	
	R	80	12			—	—	—	
	R ₁	5.5	4	6		6	7	8	
	R ₂ ≈	9	13.5	22		16	19	30	
	R ₃	4				5	6	7	
	R ₄	6	7	8		9	10	11	
	R ₅	24	28	32		36	40	44	
	R ₆	20	22	24		28	32	36	
	R ₇ ≈	4.5	5.3	6		6.8	7.5	8.3	
	R ₈ ≈	3.7	4.1	4.5		5.3	6	6.8	
	R ₉	9	9.5	10		11	12	13	
	R ₁₀	20	24	32		45	65	75	
	R ₁₁	10	12			—	—	—	
	R ₁₂	10	11	12.5		14	16	18	
	R ₁₃	14	18	—		—	—	—	
	r	1.6			2				
	H	45	50	56		64	72	78	
h	基本尺寸	25	28	32		40	45	50	
	极限偏差 h13	0 -0.330				0 -0.390			
	h ₁	9	10	11		12	14	16	
	h ₂	12	14	16		18	20	22	
	h ₃	10	11	12		14	16	18	
	B	20	22	25		28	32	36	
	b ₁	24	28	32		36	40	44	
	b ₂	20	22	24		28	32	36	
	a	8.5°				12°			
	c	1.5				2			
	轮 辐 数	3				5			
	每件重量 kg ≈	2.44	3.80	6.00		9.70	15.45	23.70	
	转动手柄 GB 4141.5—84	M10 × 80	M12 × 100			—			

1. 材料: HT20 - 40。
2. 表面处理: 喷砂镀铬 (PS/D·Cr); 镀铬抛光 (D·L₃Cr)。
3. 其他技术要求按 GB 4141.33—84 《操作件技术条件》。