


嵌 套

GB 4141.31—84

Open insert nuts

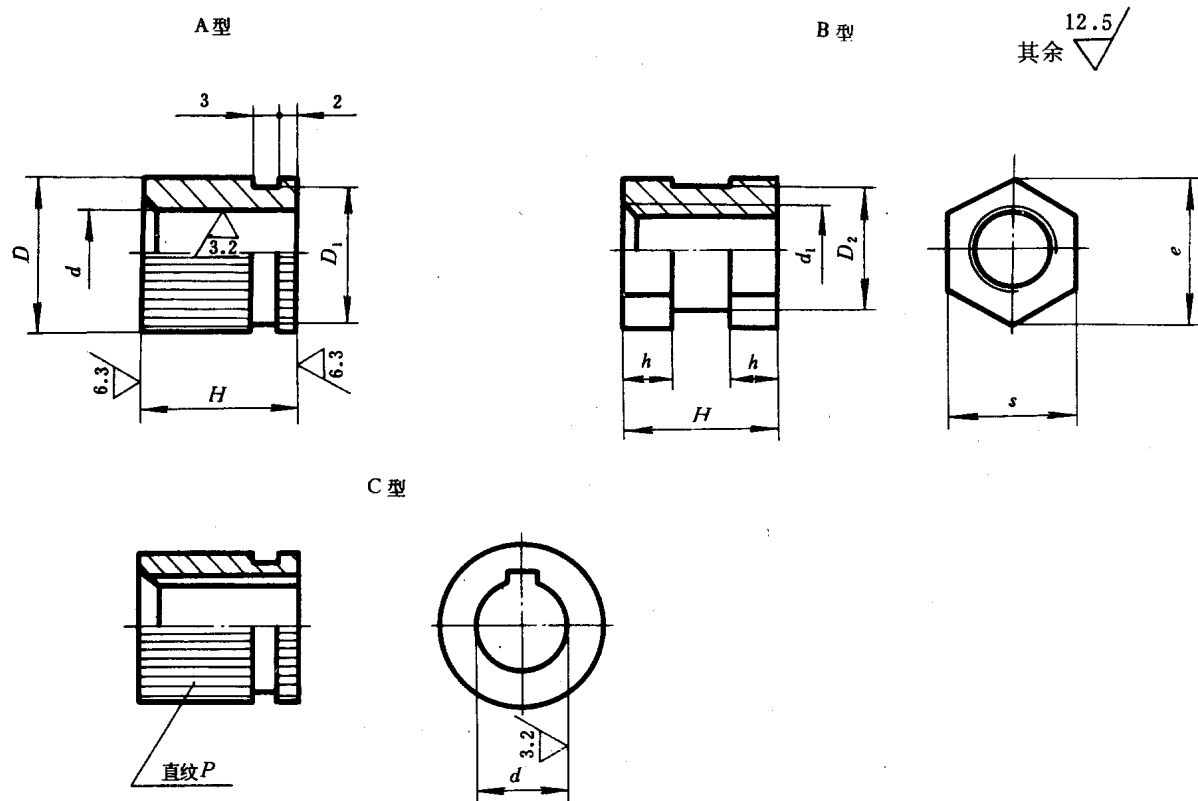

标记示例:

嵌套	A 型	$d = 12$	$H = 20$	嵌套	12×20	GB 4141.31—84
	B 型	$d_1 = M12$	$H = 20$	嵌套	BM12 $\times$ 20	GB 4141.31—84
	C 型	$d = 12$	$H = 20$	嵌套	C 12 $\times$ 20	GB 4141.31—84

GB 4141.31—84

mm

d	基本尺寸	4	5	6	8	10	12	16	18	—	22	25	28	32
	极限偏差 H8	+ 0.018 0			+ 0.022 0		+ 0.027 0			—	+ 0.033 0			+ 0.039 0
d ₁		M 4	M 5	M 6	M 8	M10	M12	M16	—	M20				
D		6	6	10	12	16	20	25	28	—	32	36	40	45
D ₁		5.	8	9	10	14	18	22	25	—	30	34	38	42
D ₂		5.5	7	8	10	14	17	22	—	27	—			
e		6.3	8.1	9.2	11.5	16.2	19.6	25.4	—	31.2	—			
s		5.5	7	8	10	14	17	22	—	27	—			
p		0.8					1.2							
H	h	每 件 重 量 kg≈												
10	3	0.001	0.002											
12	4		0.003	0.005										
14	4.5			0.006	0.007									
16	5				0.008	0.015								
18	6					0.017	0.028							
20	6.5					0.019	0.032	0.045	0.057	0.062	0.067	0.083	0.101	0.124
25	8						0.040	0.057	0.071	0.077	0.083	0.104	0.126	0.155
28	9							0.064	0.079	0.086	0.093	0.116	0.141	0.173
30	10							0.068	0.085	0.094	0.100	0.124	0.151	0.186
32	11							0.070	0.087	0.096	0.105	0.129	0.157	0.191
36	12								0.098	0.108	0.118	0.145	0.177	0.216

1. 材料: A3。

2. 其他技术要求按 GB 4141.33—84 《操作件技术条件》。