

Structural steel I and H sections — Tolerances on shape and dimensions

The European Standard EN 10034:1993 has the status of a
British Standard

UDC 669.14.018.29-423.1:621.753.1

Cooperating organizations

The European Committee for Standardization (CEN), under whose supervision this European Standard was prepared, comprises the national standards organizations of the following countries:

Austria	Oesterreichisches Normungsinstitut
Belgium	Institut belge de normalisation
Denmark	Dansk Standardiseringsraad
Finland	Suomen Standardisoimisiitto, r.y.
France	Association française de normalisation
Germany	Deutsches Institut für Normung e.V.
Greece	Hellenic Organization for Standardization
Iceland	Technological Institute of Iceland
Ireland	National Standards Authority of Ireland
Italy	Ente Nazionale Italiano di Unificazione
Luxembourg	Inspection du Travail et des Mines
Netherlands	Nederlands Normalisatie-instituut
Norway	Norges Standardiseringsforbund
Portugal	Instituto Português da Qualidade
Spain	Asociación Española de Normalización y Certificación
Sweden	Standardiseringskommissionen i Sverige
Switzerland	Association suisse de normalisation
United Kingdom	British Standards Institution

This British Standard, having been prepared under the direction of the Iron and Steel Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 December 1993

© BSI 12-1998

The following BSI references relate to the work on this standard:
Committee reference ISM/13
Draft for comment 91/38815 DC

ISBN 0 580 21968 2

Amendments issued since publication

Amd. No.	Date	Comments

Contents

	Page
Cooperating organizations	Inside front cover
National foreword	ii
Foreword	2
Text of EN 10034	3
National annex NA (informative) Committees responsible	Inside back cover
National annex NB (informative) Cross-references	Inside back cover

National foreword

This British Standard has been prepared under the direction of the Iron and Steel Standards Policy Committee and is the English language version of EN 10034:1993, *Structural steel I and H sections — Tolerances on shape and dimensions*, published by the European Committee for Standardization (CEN).

This British Standard, together with BS 4-1:1993, published simultaneously with this standard, supersedes BS 4-1:1980, which is withdrawn.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the EN title page, pages 2 to 8, an inside back cover and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

UDC 669.14.018.29-423.1:621.753.1

Descriptors: Iron and steel products, I beams, structural steels, dimensional tolerances, form tolerances

English version

Structural steel I and H sections — Tolerances on shape and dimensions

Poutrelles I et H en acier de construction —
Tolerances de formes et de dimensions

I- und H-Profil aus Baustahl —
Grenzabmaße und Formtoleranzen

This European Standard was approved by CEN on 1993-08-30. CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CEN

European Committee for Standardization
Comité Européen de Normalisation
Europäisches Komitee für Normung

Central Secretariat: rue de Stassart 36, B-1050 Brussels

Foreword

This European Standard has been prepared by ECISS/TC11 Sections: Tolerances and Dimensions; the Secretariat of which is held by BSI.

The discussions within ECISS/TC11 were based on Euronorm 34-62 *Broad flanged beams with parallel sides. Rolling tolerances*

and Euronorm 44-63 *Hot rolled IPE joists. Rolling tolerances*

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at least by March 1994, and conflicting national standards shall be withdrawn at the latest by March 1994.

According to the CEN/CENELEC Internal Regulations, the following countries are bound to implement this European Standard: Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

Contents

	Page
Foreword	2
1 Scope	3
2 Normative references	3
3 Definitions	3
4 Rolling tolerances for structural steel I and H sections	3
5 Tolerance on mass	3
6 Tolerance on length	3
Annex A (informative) Straightness measurement	7
Figure 1 — Measurement of length <i>L</i> on I and H steel sections	6
Table 1 — Dimensional tolerances for structural steel I and H sections	4
Table 2 — Tolerances on out-of-square and web off-centre of structural steel I and H sections	5
Table 3 — Tolerances on straightness of structural steel I and H sections	6

1 Scope

This European Standard specifies tolerances on shape dimensions and mass of structural steel I and H sections. These requirements do not apply to I and H sections rolled from stainless steel. These requirements do not apply to taper flange sections.

NOTE Until a European Standard for dimensions of I and H beams is published Euronorm 19 and Euronorm 53 or corresponding national standards may be used.

2 Normative references

This European Standard incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this European Standard only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

EN 10079, *Definition of steel products*.

Euronorm 19:1957, *IPE beams, parallel flanged beams*.

Euronorm 53:1962, *Wide flange beams with parallel flanges*.

3 Definitions

For the purpose of this European Standard, the definitions in EN 10079 apply.

4 Rolling tolerances for structural steel I and H sections

4.1 Section height (h)

The deviation from nominal on section height measured at the centre line of web thickness shall be within the tolerance given in Table 1.

4.2 Flange width (b)

The deviation from nominal on flange width shall be within the tolerance given in Table 1.

4.3 Web thickness (s)

The deviation from nominal on web thickness measured at the mid-point of dimension h shall be within the tolerance given in Table 1.

4.4 Flange thickness (t)

The deviation from nominal on flange thickness measured at the quarter flange width point shall be within the tolerance given in Table 1.

4.5 Out-of-squareness ($k + k'$)

The out-of-squareness of the section shall not exceed the maximum given in Table 2.

4.6 Web off-centre (e)

The mid-thickness of the web shall not deviate from the mid-width position on the flange by more than the distance (e) given in Table 2.

4.7 Straightness (q_{xx} or q_{yy})

The straightness shall comply with the requirements given in Table 3.

5 Tolerance on mass

The deviation from the nominal mass of a batch or a piece shall not exceed $\pm 4.0 \%$.

The mass deviation is the difference between the actual mass of the batch or piece and the calculated mass.

The calculated mass shall be determined using a density of $7,85 \text{ kg/dm}^3$.


6 Tolerance on length

The sections shall be cut to ordered lengths to tolerances of:

- a) $\pm 50 \text{ mm}$; or
- b) $+ 100 \text{ mm}$ where minimum lengths are requested.

L represents the longest useable length of the section assuming that the ends of the section have been cut square (see Figure 1).

Table 1 — Dimensional tolerances for structural steel I and H sections

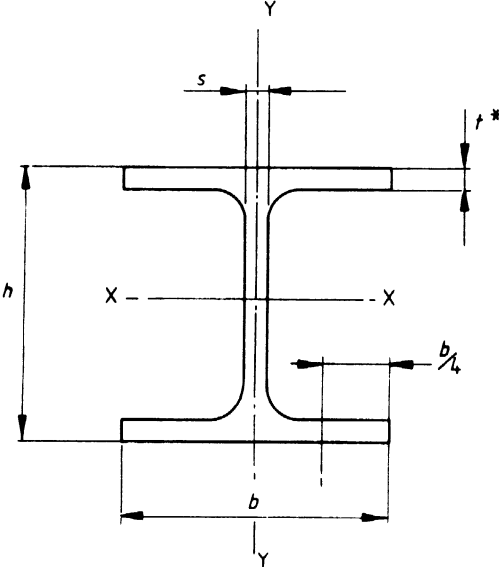

* t is measured at $b/4$
(see clause 4.4.)

Section height h		Flange width b		Web thickness s		Flange thickness t	
height mm	tolerance mm	width mm	tolerance mm	thickness mm	tolerance mm	thickness mm	tolerance mm
$h \leq 180$	+ 3,0 - 2,0	$b \leq 110$	+ 4,0 - 1,0	$s < 7$	$\pm 0,7$	$t < 6,5$	+ 1,5 - 0,5
$180 < h \leq 400$	+ 4,0 - 2,0	$110 < b \leq 210$	+ 4,0 - 2,0	$7 \leq s < 10$	$\pm 1,0$	$6,5 \leq t < 10$	+ 2,0 - 1,0
$400 < h \leq 700$	+ 5,0 - 3,0	$210 < b \leq 325$	+ 4,0 - 4,0	$10 \leq s < 20$	$\pm 1,5$	$10 \leq t < 20$	+ 2,5 - 1,5
$h > 700$	+ 5,0 - 5,0	$b > 325$	+ 6,0 - 5,0	$20 \leq s < 40$	$\pm 2,0$	$20 \leq t < 30$	+ 2,5 - 2,0
				$40 \leq s < 60$	$\pm 2,5$	$30 \leq t < 40$	+ 2,5 - 2,5
				$s \geq 60$	$\pm 3,0$	$40 \leq t < 60$	+ 3,0 - 3,0
						$t \geq 60$	+ 4,0 - 4,0

Table 2 — Tolerances on out-of-square and web off-centre of structural steel I and H sections

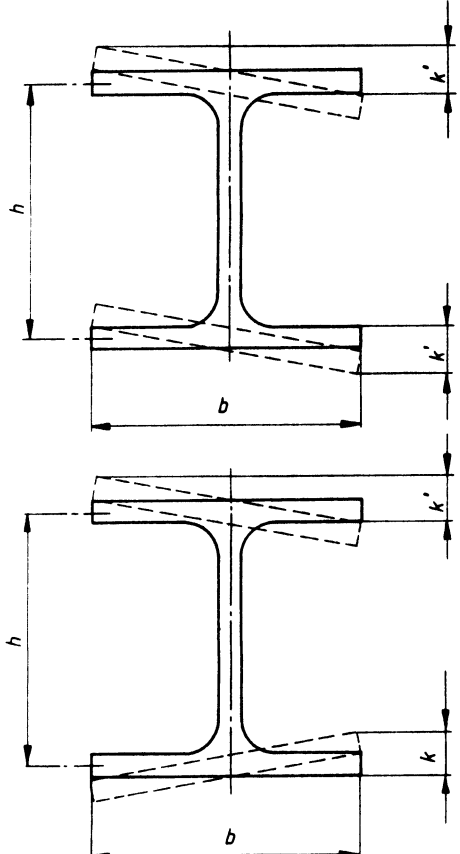
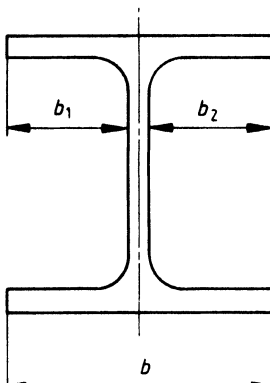
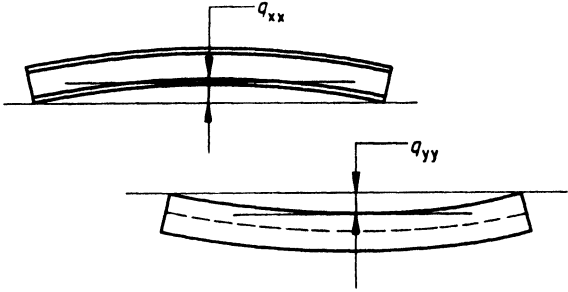
			
Out-of-square $k + k'$		Web off-centre e where $e = \frac{b_1 - b_2}{2}$	
flange width b mm	tolerance mm	flange width b mm	tolerance mm
$b \leq 110$	1,5	Where $t < 40$	
$b > 110$	2 % of b (max 6,5 mm)	$b \leq 110$	2,5
		$110 < b \leq 325$	3,5
		$b > 325$	5,0
		Where $t \geq 40$	
		$110 < b \leq 325$	5,0
		$b > 325$	8,0

Table 3 — Tolerances on straightness of structural steel I and H sections

	
Section height <i>h</i> mm	Tolerance on straightness <i>q_{xx}</i> and <i>q_{yy}</i> on length <i>L</i> %
80 < <i>h</i> < 180	0,30 <i>L</i>
180 < <i>h</i> ≤ 360	0,15 <i>L</i>
<i>h</i> > 360	0,1 <i>L</i>

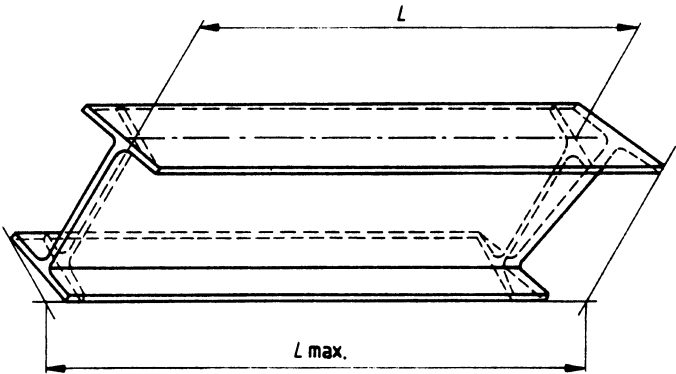


Figure 1 — Measurement of length *L* on I and H steel sections

Annex A (informative)

Straightness measurement

Straightness measurement requires a reference straight edge from which deviations in section straightness are measured. A taut string line is an acceptable straight edge provided that deviations in the horizontal plan only are measured.

Measurement is carried out as follows:

for q_{xx} :

The beam is laid in the H position on a flat surface and the string is taken along the outside of the centre of the flange width between the two ends of the unconstrained section.

for q_{yy} :

The beam is laid in the I position on a flat surface and the string is taken along the flange tip between the two ends of the unconstrained section.

National annex NA (informative)

Committees responsible

The United Kingdom participation in the preparation of this European Standard was entrusted by the Iron and Steel Standards Policy Committee (ISM/-) to Technical Committee ISM/13 upon which the following bodies were represented:

BEAMA Ltd.

British Constructional Steelwork Association Ltd.

British Steel Industry

National Association of Steel Stockholders

National annex NB (informative)

Cross-references

Publication referred to	Corresponding British Standard
Euronorm 19	BS 4 <i>Structural steel sections</i>
Euronorm 53	
	Part 1:1993 <i>Specification for hot-rolled sections</i>
EN 10079:1992	BS EN 10079:1993 <i>Definition of steel products</i>

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.